


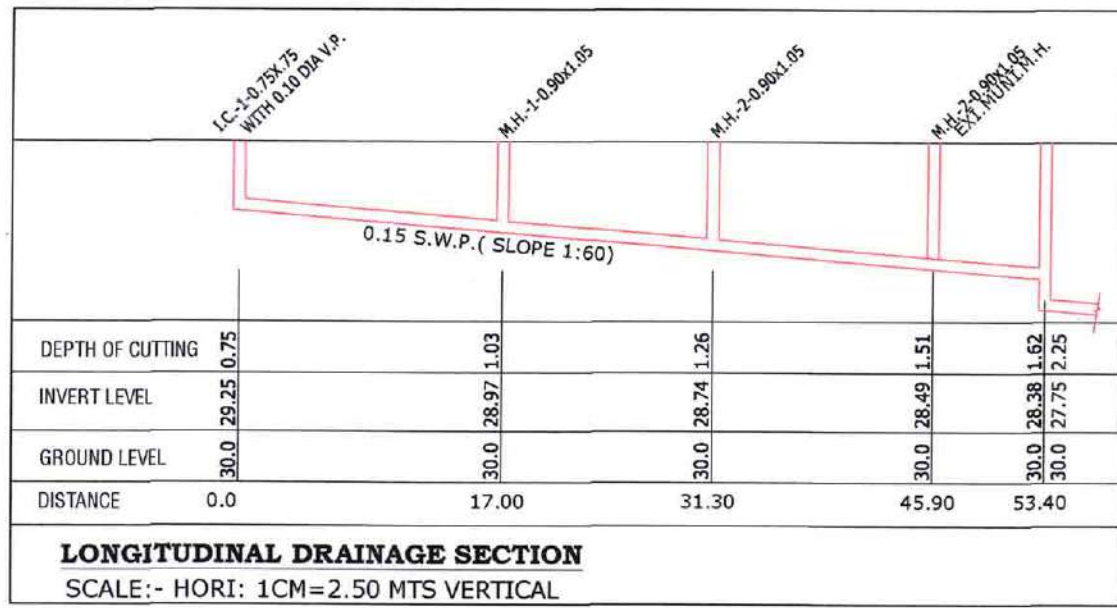

REQD. TREE PLANTATION
PLOT AREA :- 2673.00 SQ.MTS.
200 SQ. MTS. / 5 TREE
2673.00 SQ. MTS. / 5 TREE
2673.00 X 5 / 200 = 66.82 TREE
= SAY 67 TREES REQUIRED
PROVIDED = 67 TREES

REQD. PERCOLATING WELL
PLOT AREA :- 2673.00 SQ. MTS.
REQUIRED 1500 TO 4000 SQ. MTS. = 1 P.W.
2673.00 / 4000 = 0.66 P.W.
= SAY 1 PERCOLATING WELL REQUIRED
PROVIDED = 1 PERCOLATING WELL

CONTAINER BIN AREA CAL. RESI.
RESI: 1 UNIT 10 LIT. REQ. 1 CONTAINER
TOTAL UNIT 52 X 10 LIT. 520 LIT.
520/80 = 6.50 SAY 7 NOS. CONT.
REQD. 7 NOS BIN OF 80 LIT. CAP.
PROVL. 7 NOS BIN OF 80 LIT. CAP.

COMMON PLOT AREA CALC.
10.01 X 26.78 = 268.07 SQ.MTS.

FIRE HYDRANT LEGEND

SR.	SYMBOL	DISCRIPTION
1		FIRE HYDRANT PIPE MAIN
2		SLUICE VALVE
3		NON RETURN VALVE
4		COURT YARD HYDRANT VALVE
5		LANDING HYDRANT VALVE
6		HOSE BOX
7		FIRST AID HOSE REEL
8		AIR RELEASE VALVE
9		TWO WAY SIAMESE CONNECTION
10		RISE OR DROP

NOTES RELATED TO FIRE SAFETY:-

HYDRANT SYSTEM:
ON/OFF switches located near the hose reel hose or hydrant outlet, at each floor the main FirePump at the underground water tank with a capacity to discharge 900 liters per minute at 3 bar. pressure as measured at the terrace level should be installed. The Riser for the buildings exceeding 18 meters and above 18 meters height should not be of less than 100 mm. internal diameter. The riser should be connected to the bottom of the terrace tank with a stop valve and a NRV to act as a Down - corner. One riser is required for every 1000sq. meters floor area and if the building is divided into, two or more parts then each part should have a separate riser with all the fittings at floor level. Each floor should have a hydrant outlet with a coupling for attaching a 63 mm.dia hose & 25 mm.bore Hose-reel hose with 8 mm. SS. Shut-off nozzle at each floor landing. The length of the hose reel hose should be enough to reach the farthest corner of the floor. Hose-box with 15 meters long 63mm. dia. hose and 12.5 mm. bore nozzle at alternate floors. The Hose-reel hose should be coupled to the Riser. Fire-service inlet should be installed at a point near the entry to the premises where a Fire service vehicle can approach easily. A permanent hydrant point comprising of 63 mm.dia size zones of hydrant valves should be installed at the terrace level. Overhead tank Refilling bypass connection should be done at the terrace level. The Overhead tank shall be of a capacity of not less than 20,000 liters. The Underground tank shall be 2/3 FIRE LIFT IN 1,00,000 liters.

The Fire-Lift and all the lifts should have a provision to ground automatically in case of electricity failure. Each building should have at least one lift as a Fire-Lift and if the building is divided into two or more parts then each should have a Fire-Lift. Lift-well should have blowers to pressurize the lift-well so connected that it will automatically operate when alarm call point is operate, so that it prevents the lift well getting smoke logged.

3. FIRE ALARM:

Fire alarm call point to be installed at each floor with sounders capable of being heard all throughout the building.

4. FIRE EXTINGUISHERS

One Carbon Dioxide (CO2) type extinguisher of 4.5 kg. with ISI mark, and one extinguisher of 5kg. Dry Chemical Powder (DCP) type extinguisher with ISI mark to be installed on each floor/corridor/corner. One Carbon Dioxide (CO2) type extinguisher of 4.5 kg. with ISI mark. OR Two Carbon Dioxide (CO2) type extinguisher of 2 kg. with ISI mark capacity on alternate floors in case of residential building. If the building is divided into two or more parts then each part should have these extinguishers installed.

5. STAIRCASE :

The staircase has to be open from at least one or two sides but if the staircase is in the centre core of the buildings it has to be pressurized to prevent it from getting smoke logged. The Riser/Down-come should be located in the staircase or close to it in make it easily approachable in case of Fire from the floor below or above.

6. BASEMENT :

The basement of 200 sq. meters or more should be protected with Automatic Sprinkler system with at least one sprinkler head for actual Car parking space. Additionally be protected by a Hydrant outlet and two 25 mm. bore Hose-reel hoses with 8 mm. bore nozzles at each basement level.

7. LIGHTENING ARRESTER :

A lightning arrester should also be installed and be properly earthed to prevent damage to the building when the lightning strikes.

8. PHOTO LUMINESCENT (AUTO GLOW) SIGNAGES:

If the building falls in a confined area or if it has an enclosed staircase or is not well lit-up on the inside, then adequate photo luminescent (auto glow) signage's should be displayed at each floor / landing / pathway / dead-end along all exit routes leading to the ground level. The signage should indicate fire fighting, fire safety equipment present on the respective floor/landing/pathway/dead-end and along all exit routes leading to the ground level.

9. ELECTRIC POWER SUPPLY TO THE ENTIRE FIRE-SAFETY SYSTEM

Electricity supply to the fire pump, fire alarm system, staircase pressurization system and fire lift should be made available from the main Electrical supply. (i.e. from Electrical power supply of the company) This is to ensure availability of power supply to the fire protection & Safety system even after the main electrical supply to the building is switched off at the time of fire.


10. INDIVIDUAL FIRE SEFTY SYSTEM

SHOW ROOM BY OWNER/FIRE SEFTY SYSTEM SHOULD BE PROVIDED INDIVIDUAL

IMPORTANT INSTRUCTIONS:

After inspection of a low-rise building by the fire service authority if the fire officer concerned feels in need for additional fire prevention/protection measures / ventilation system required or equipment (i.e. - Passive system / suppression system / Fire door - Window / Detection system / Active system / Sprinkler / Drencher etc.) as per Fire load / Fire risk / Public gathering. Potential / Occupancy / Confined area, those additional measures / equipment have to be implemented / installed.

SCRUTINIZE COPY
No. 130/8/2022
TDO, BPSP, AMC

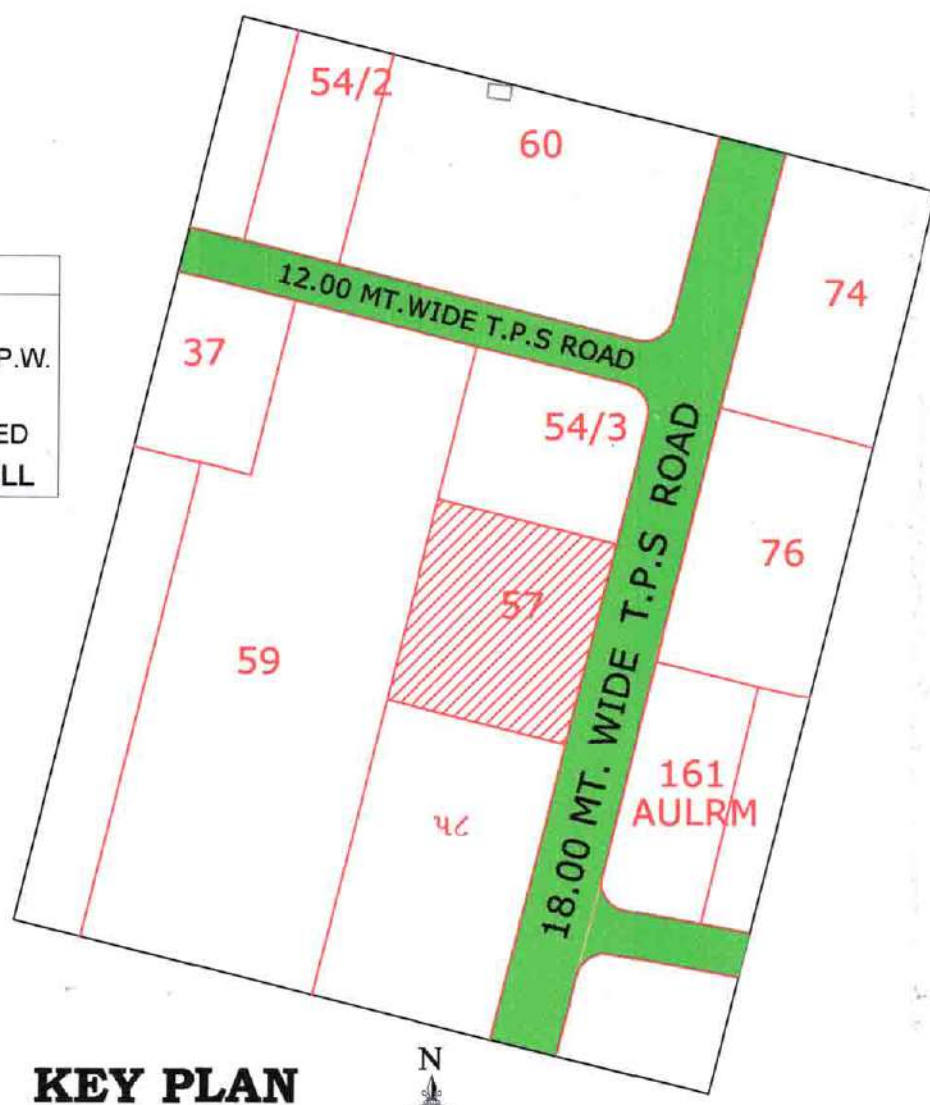


PLOT AREA AS PER F FORM & REVENUE RECORD

DISTRICT	TALUKA	MOJE	REVENUE SURVEY NO.	REVENUE PLOT AREA (IN SQ.MTS.)	O.P. NO.	O.P.AREA (IN SQ.MTS.)	F.P. NO.	F.P.AREA (IN SQ.MTS.)
AHMEDABAD	GHATLODIA	GOTA	93/4	4455.00	57	4455.00	57	2673.00

NOTES : 6.3.2.4.C.C (A+B)
(METER ROOM IN H.P. SHALL NOT BE CONSIDERED TOWARDS COMPUTATION OF F.S.I.)

NOTE RELATED TO CGDCR 2017 :-

- IT IS CERTIFIED THAT PLOT UNDER REFERENCE IS SURVEYED BY ME AND THE DIMENSIONS OF ALL SIDES OF PLOT AND PLOT AREA AS SHOWN IN PLAN ARE MEASURED/ENGINEERED AND IN ACCORDANCE WITH OWNERSHIP / REVENUE RECORD.
- ENGINEER IS FULLY RESPONSIBLE FOR LEAVING OPEN SPACE AND MARGIN.
- THE DEPTH AND POSITION OF EXISTING MUNICIPAL MAINLINE IS VERIFIED ME ON SITE AND PREMISES CAN GATE DRAINAGE CONNECTION.
- IT IS CERTIFY THAT ACCORDING TO CGDCR 2017, ALL REQUIREMENTS OF THE BUILDING ARE CHECKED AND NECESSARY ACTIONS ARE TAKEN.
- IT IS CERTIFY THAT ACCORDING TO THE CLAUSE NO. 4.4.3 OF THE CGDCR 2017, THE STRUCTURE OF THE BUILDING IS DESIGN AS PER THE NORMS OF THE INDIAN STANDARDS.
- DESIGN OF STAIRCASE AND RAILING IS PROVIDED AS PER THE PROVISION OF THE CLAUSE NO.13.1.11 AND 13.1.13 OF CGDCR 2017.
- PEDESTRIANS RAMP IS PROVIDED AS PER THE PROVISION OF THE CLAUSE NO. 13.1.14 OF CGDCR 2017.
- WATER TANK IS PROVIDED AS PER THE PROVISION OF THE CLAUSE NO.13.6 OF CGDCR 2017.
- LETTER BOX FOR EACH UNIT SHALL BE PROVIDED AT GROUND LEVEL FOR EACH UNIT.
- WATER TANK FOR FIRE SAFETY REQUIREMENT PROVIDED AS PER PREVENTION AND FIRE SAFETY ACT-2018
- ELECTRICAL INFRASTRUCTURE SHALL BE PROVIDED AS PER CLAUSE NO. 13.11 OF CGDCR 2017.
- DRINKING WATER FACILITY FOR DISABLED PERSONS IS PROVIDED AS PER THE CLAUSE NO. 13.6.2 OF CGDCR 2017.
- DRAINAGE FACILITY IS PROVIDED AS PER THE CLAUSE NO. 21.10 OF CGDCR 2017.
- SIGNAGES OF THE PARKING PLACE IS TO BE PROVIDED AS PER THE CLAUSE NO. 13.7 OF CGDCR 2017.
- ENTRANCE OF THE BUILDING IS PROVIDED AS PER THE CLAUSE NO. 13.1.6 OF CGDCR 2017.
- THE PAVING OF BUILDING UNIT/FINAL PLOT AS PER THE PROVISION OF THE CLAUSE NO. 13.1.3 OF CGDCR 2017.
- THE STRUCTURAL DESIGN OF BUILDING IS AS PER THE NORMS OF SPECIFIED IN THE INDIAN STANDARD AND NECESSARY ACTION SHALL BE TAKEN FOR THE STRUCTURAL SAFETY DURING THE CONSTRUCTION.
- RAIN WATER STORAGE TANK AND RAIN WATER HARVESTING SYSTEM IS PROVIDED AS PER THE CLAUSE NO. 17.2 OF CGDCR 2017.
- COMMUNITY BIN PROVIDED AS PER THE PROVISION OF THE CLAUSE NO.17.2.4 & 17.2.5 OF CGDCR 2017.
- GREY WATER RECYCLING SYSTEM & DUAL PLUMBING SYSTEM IS PROVIDED AS PER THE CLAUSE NO. 17.3 OF CGDCR 2017.
- TREE PLANTATION IS PROVIDED AS PER THE CLAUSE NO. 17.4 OF CGDCR 2017.
- SOLAR WATER HEATING SYSTEM IS PROVIDED AS PER THE CLAUSE NO. 17.5 OF THE CGDCR 2017.
- POLLUTION CONTROL SYSTEM IS PROVIDED AS PER CHAPTER NO. 18 OF CGDCR 2017.
- FIRE SAFETY SYSTEM IS PROVIDED AS PER CHAPTER NO. 22 OF CGDCR 2017.
- FIRE SAFETY PREVISIONS SHALL BE MADE AS PER FIRE PREVENTION AND LIFE SAFETY MEASURES REGULATION-2016 AND FIRE PREVENTION AND LIFE SAFETY MEASURES ACT-2018.
- MAINTENANCE AND UPGRADATION OF BUILDING IS AS PER CHAPTER NO. 19 OF CGDCR 2017.
- MARGINAL SPACE & CELLAR SLAB SHALL HAVE LOAD BEARING CAPACITY OF 4500 TONNES PER SQUARE METER SHALL BE PROVIDED AS PER CHAPTER NO. 14.0 OF CGDCR 2017 & FIRE PREVENTION AND LIFE SAFETY ACT-2018
- ROOF TOP SOLAR ENERGY INSTALLATIONS & GENERATION SHALL BE PROVIDED AS PER CLAUSE NO. 17.5.1 OF CGDCR 2017.
- THE GLAZED SURFACE AREA OF THE EXTERNAL FACADE SHALL BE NON REFLECTIVE AND PROVIDED UP TO MAX OF 50% OF THE TOTAL SURFACE AREA OF EACH FACADE WITH THE PROVISION OF SAFETY RAILING UP TO SILL LEVEL AS PER CLAUSE NO. 13.13 OF CGDCR-2017
- VENT OF BASEMENT IS PROVIDED AS CGDCR-2017 OF CLAUSE NO. 13.4.2

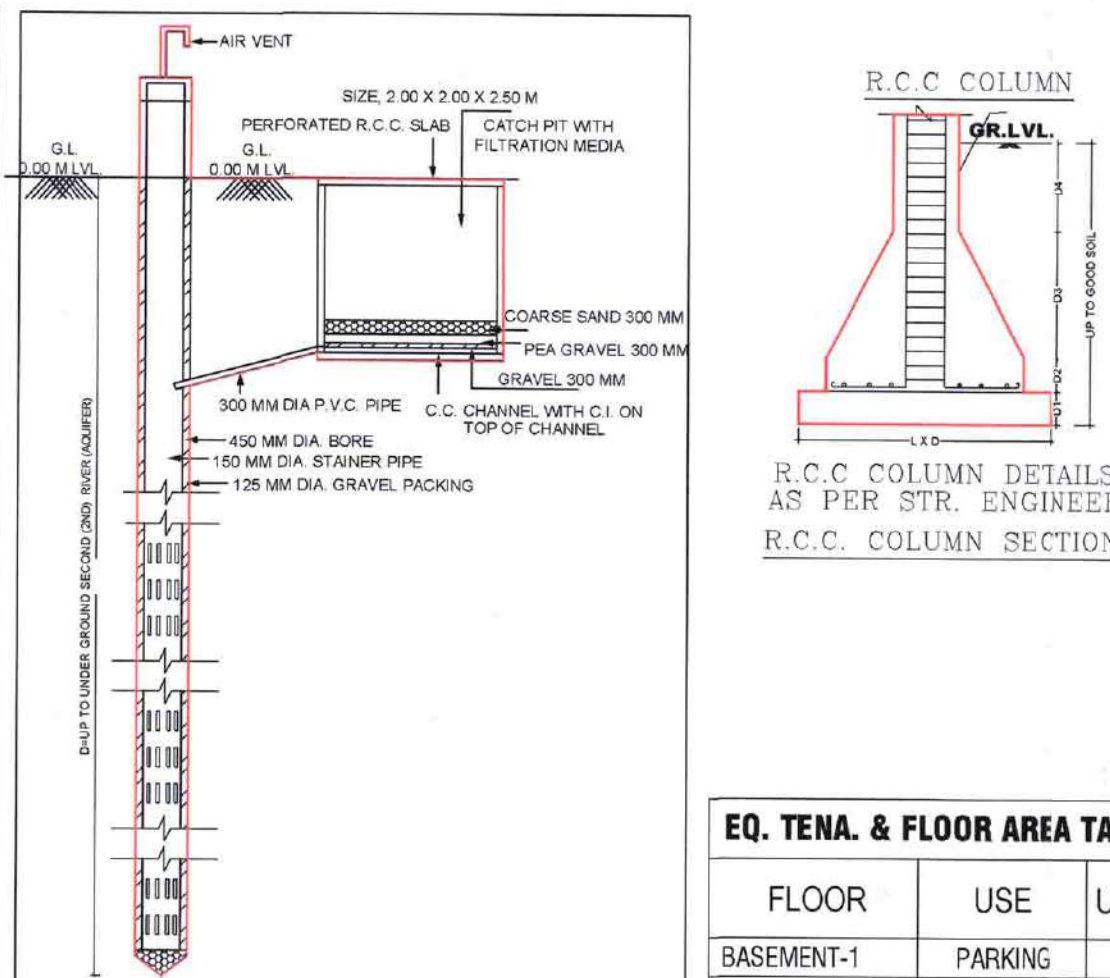

EQ. TENA. & FLOOR AREA TABLE

FLOOR	USE	UNIT	SQ.MT	S
BASEMENT-1	PARKING	--	---	---
BASEMENT-2	PARKING	--	---	---
GR. FL. (HOLLOW PLINTH) PARKING	PARKING	--	---	---
GR. FL. (S.P.)	SOCIETY COMMON USE	--	421.59	---
R.R. FL.	RESI.	04	825.52	---
SEC. FL.	RESI.	04	825.52	---
3RD. FL.	RESI.	04	825.52	---
4TH. FL.	RESI.	04	825.52	---
5TH. FL.	RESI.	04	825.52	---
6TH. FL.	RESI.	04	825.52	---
7TH. FL.	RESI.	04	825.52	---
8TH. FL.	RESI.	04	825.52	---
9TH. FL.	RESI.	04	825.52	---
10TH. FL.	RESI.	04	825.52	---
11TH. FL.	RESI.	04	825.52	---
12TH. FL.	RESI.	04	825.52	---
13TH. FL.	RESI.	04	825.52	---
TOTAL	PARKING-SOCIETY COMMON USE+RESIDENCE	52	11153.35	---

BUILT UP AREA TABLE	SQ.MTS.
IT UP AREA OF BASEMENT-1	1941.70
BUILT UP AREA OF BASEMENT-2	1941.70
BUILT UP AREA ON GR. FL. (H.P.)	669.95
BUILT UP AREA ON GR. FL. (S.P.)	421.59
BUILT UP AREA ON 1ST. FL.	1042.46
BUILT UP AREA ON 2ND. FL.	1042.46
BUILT UP AREA ON 3RD. FL.	1042.46
BUILT UP AREA ON 4TH. FL.	1042.46
BUILT UP AREA ON 5TH. FL.	1072.86
BUILT UP AREA ON 6TH. FL.	1042.46
BUILT UP AREA ON 7TH. FL.	1042.46
BUILT UP AREA ON 8TH. FL.	1072.86
BUILT UP AREA ON 9TH. FL.	1042.46
BUILT UP AREA ON 10TH. FL.	1042.46
BUILT UP AREA ON 11TH. FL.	1072.86
BUILT UP AREA ON 12TH. FL.	1042.46
BUILT UP AREA ON 13TH. FL.	1042.46
BUILT UP AREA ON STAIR CABIN	135.08
BUILT UP AREA ON D.H.W.T	75.19
TOTAL BUILT UP AREA	18828.56

F. S. I. AREA TABLE	SQ.MTS.
F. S. I. AREA ON GR. FL.	421.59
F. S. I. AREA ON SEC. FL.	826.52
F. S. I. AREA ON 1ST. FL.	826.52
F. S. I. AREA ON 2ND. FL.	826.52
F. S. I. AREA ON 3RD. FL.	826.52
F. S. I. AREA ON 4TH. FL.	826.52
F. S. I. AREA ON 5TH. FL.	826.52
F. S. I. AREA ON 6TH. FL.	826.52
F. S. I. AREA ON 7TH. FL.	826.52
F. S. I. AREA ON 8TH. FL.	826.52
F. S. I. AREA ON 9TH. FL.	826.52
F. S. I. AREA ON 10TH. FL.	826.52
F. S. I. AREA ON 11TH. FL.	826.52
F. S. I. AREA ON 12TH. FL.	826.52
F. S. I. AREA ON 13TH. FL.	826.52
TOTAL F. S. I. AREA	11166.35

LAY OUT PLAN SHEET NO :- 1 / 5

ON F.P. NO. : 57 OF T.P.S. NO. 32 (GOTA) FINAL SANCTIONED [REVENUE SURVEY NO. : 93/4 (O.P. NO. : 57) OF VILLAGE / MOJE : GOTA , TALUKA :- GHATLODIA ,DISTRICT :- AHMEDABAD]

SCALE : 1.00 CM = 2.00 MT.

ZONE AS PER RDP-2021 : RESIDENTIAL-1 (ONE) R1

USE :- RESIDENCE (DWELLING-3)

AREA TABLE	SQ. MTS.
PLOT AREA OF F.P. NO. : 57	2673.00
REQD. COMMON PLOT AREA @ 10 % OF F.P. AREA	267.30
PROVIDED COMMON PLOT AREA	268.07

F.S.I. AREA TABLE	SQ. MTS.
PLOT AREA OF F.P. NO. : 57	2673.00
PERMI. BASE ZONE F.S.I. AREA (2673.00 X 1.80)	4811.40
PERMI. CHARGEABLE F.S.I. AREA (2673.00 X 0.90)	2405.70
TOTAL PERMI. F.S.I. AREA	7217.10
UTILIZED BASE ZONE F.S.I. AREA	4811.40

T.D.R. F. S. I. AREA TABLE	SQ. MTS.
T.D.R. F. S. I. RIGHTS	3950.00
UTILIZED T.D.R. F. S. I. (1166.35 - 7217.10)	3949.25

COLOUR NOTE :	COMMON PLOT	COM BIN.
PROP. WORK	ROAD	TREE
PROP. DRAINAGE	F.P. BOUNDARY	P.W.
BASEMENT LINE	SPRINKLER	

OWNER	SHRI RAMANLAL A. PATEL SHMT. VASANTIBEN R. PATEL SHRI ASHISH R. PATEL SHRI NITIN R. PATEL POA HOLDEER V. V. JALIDON	DEVELOPER	NTINKUMAR R. PATEL 13, Shri Hari Society, Kadal, Gandhinagar-382721. 0012606052710750	C.O.W.	HITESH R. PATEL R-46, Vasudev Bunglows, Amarnadi, Daskroi, Ahmedabad City-382445. 001SR06052711372
-------	---	-----------	--	--------	--




ENGINEER	GEET P. SHAH 501, 5th Floor, Vardaan Arcade, Nr. Shell Petrol Pump, A.E.C. Cross Road, Narapur, Ahmedabad-380011. Copy License No. 001SRH17102610418	STR. ENGINEER	JAYSH D. DESAI SD-1 LIC NO. 001SE20022600349 89, Swami Akhandanand Society, Ghatlodia, Ahmedabad
----------	--	---------------	---

Authority	T.D. Sub Inspector (B.P.S.P.)	T.D. Inspector (B.P.S.P.)	Asst. I.D.O (B.P.S.P.)
-----------	-------------------------------	---------------------------	------------------------

BUILT UP AREA CALC.				
1ST. & 2ND. BASEMENT FLOOR				
39.74	X	48.86	=	1941.70
BUILT UP AREA ON 1ST. & 2ND. BASEMENT FLOOR = 1941.70 SQ.MTS.				

FIRE NOTES :

- ALL BASEMENTS PARKING & HPP SHALL BE FULLY SPRINKLERED
- ALL LOWER BASEMENTS SHOULD HAVE POSITIVE PRESSURE VENTILATION
- ELECTRIC CABLE SHAFT SHOULD HAVE FIRE RESISTANT DOORS



ZONE AS PER RDP-2021 : RESIDENTIAL-1 (ONE) R1
USE :- RESIDENCE (DWELLING-3)

FLOOR	USE	EQ. TENA	FL. AREA	F.S.I. AREA	B.UP AREA
-------	-----	----------	----------	-------------	-----------

BASEMENT-1	PARKING	--	---	---	1941.70
BASEMENT-2	PARKING	--	---	---	1941.70
GR. FL. (H.D.)	PARKING	--	---	---	660.05

GR. FL. (S.P.)	SOCIETY COMMON USE	--	421.59	421.59	421.59	1091.54
1ST FLOOR	RES	4	826.52	826.52	1042.48	

2ND. FLOOR	RESI.	4	826.52	826.52	1042.48
3RD. FLOOR	RESI.	4	826.52	826.52	1042.48
4TH. FLOOR	RESI.	4	826.52	826.52	1042.48

5 TH. FLOOR	RESI.	4	826.52	826.52	1072.85
6 TH. FLOOR	RESI.	4	826.52	826.52	1042.48

8 TH. FLOOR	RESI.	4	826.52	826.52	1072.85
9 TH. FLOOR	RESI.	4	826.52	826.52	1042.48

10 TH. FLOOR	RESI.	4	826.52	826.52	1042.48
11 TH. FLOOR	RESI.	4	826.52	826.52	1072.85
12 TH. FLOOR	RESI.	4	826.52	826.52	1042.48

13 TH. FLOOR	RES.	4	826.52	826.52	1042.48
STAIR CABIN	---		---	---	135.08

TOTAL	PARKING+ SOCIETY COMM.	52	11166.35	11166.35	18828.56
-------	------------------------	----	----------	----------	----------

	RESIDENCE				

DOOR	WINDOWS	VENTILATION
SD = 2.75 X 2.45	W = 4.22 X 1.25	V = 0.60 X 0.60

D1 = 0.91 X 2.15	W1 = 2.73 X 1.85	WITH SAFETY
D2 = 0.76 X 2.15	W2 = 1.62 X 1.85	
FRD = 1.05 X 2.15	W3 = 2.10 X 1.85	

W4 = 5.00 X 1.00	0.60M. SILL
W5 = 1.85 X 1.85	
W6 = 0.62 X 1.22	

	W8 = 2.57 X 1.85	
	W9 = 5.39 X 1.85	
	W10 = 0.45 X 1.85	

 PROPOSED WORK
 PROPOSED DRAINAGE

	RISER = 0.16 MT.

Shri Ramanlal A. Patel
Shri. Vasantiben R. Patel

Shri Ashish K. Patel
Shri Nalin R. Patel
Shri R. B. Baidson

10/10/10 Partner 13, Shri Kalol, Gandhinagar 21DV06052710

OWNER Smith DEVELOPER


[illegible]

1	
---	--

GEET P. SHAH

SD-1 LIC No. 001SE100221
89, Swami Akhandanand Society,
Ghatlodiya, Ahmedabad

ENGINEER.	STRUC. ENG.
-----------	-------------

[illegible]

APPROVAL OF DRAWINGS AND ACCEPTANCE OF
STRUCTURAL REPORT, STRUCTURAL DRAWINGS, PROGRESS CERTIFICATE OR
BUILDING COMPLETION CERTIFICATES SHALL NOT DISCHARGE THE OWNER,
ENGINEER, ARCHITECT, CLERK OF WORKSITE SUPERVISOR, STRUCTURAL DESIGNER,
DEVELOPER, OWNER FROM THEIR RESPONSIBILITIES, IMPOSED UNDER THE ACT, THE
NATIONAL BUILDING REGULATIONS AND THE LAWS OF TORT AND LOCAL ACTS.

NOTWITHSTANDING ANYTHING TO THE CONTRARY CONTAINED HEREIN, ANY PERSON UNDERTAKING ANY DEVELOPMENT WORK SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES. THESE REGULATIONS, ANY PERSON UNDERTAKING ANY DEVELOPMENT WORK SHALL BE WHOLLY AND SOLELY LIABLE FOR ANY INJURY OR DAMAGE OF ANY KIND WHATSOEVER THAT MAY BE CAUSED BY ANY ONE IN OR AROUND THE AREA DURING SUCH CONSTRUCTION AND NO LIABILITY WHATSOEVER IN THIS REGARD SHALL BE CAST ON THE AUTHORITY.

RECEIVED
AGRICULTURE
DEPARTMENT
GOVERNMENT OF INDIA

RECEIVED
AGRICULTURE
DEPARTMENT
GOVERNMENT OF INDIA

Ahmedabad Municipal Corporation





Plan Approved as per terms and condition mentioned in the Commencement Certificate

Date: ୦୫/୦୭/୨୦୧୯

02-03-2022

1572 MSP. 1



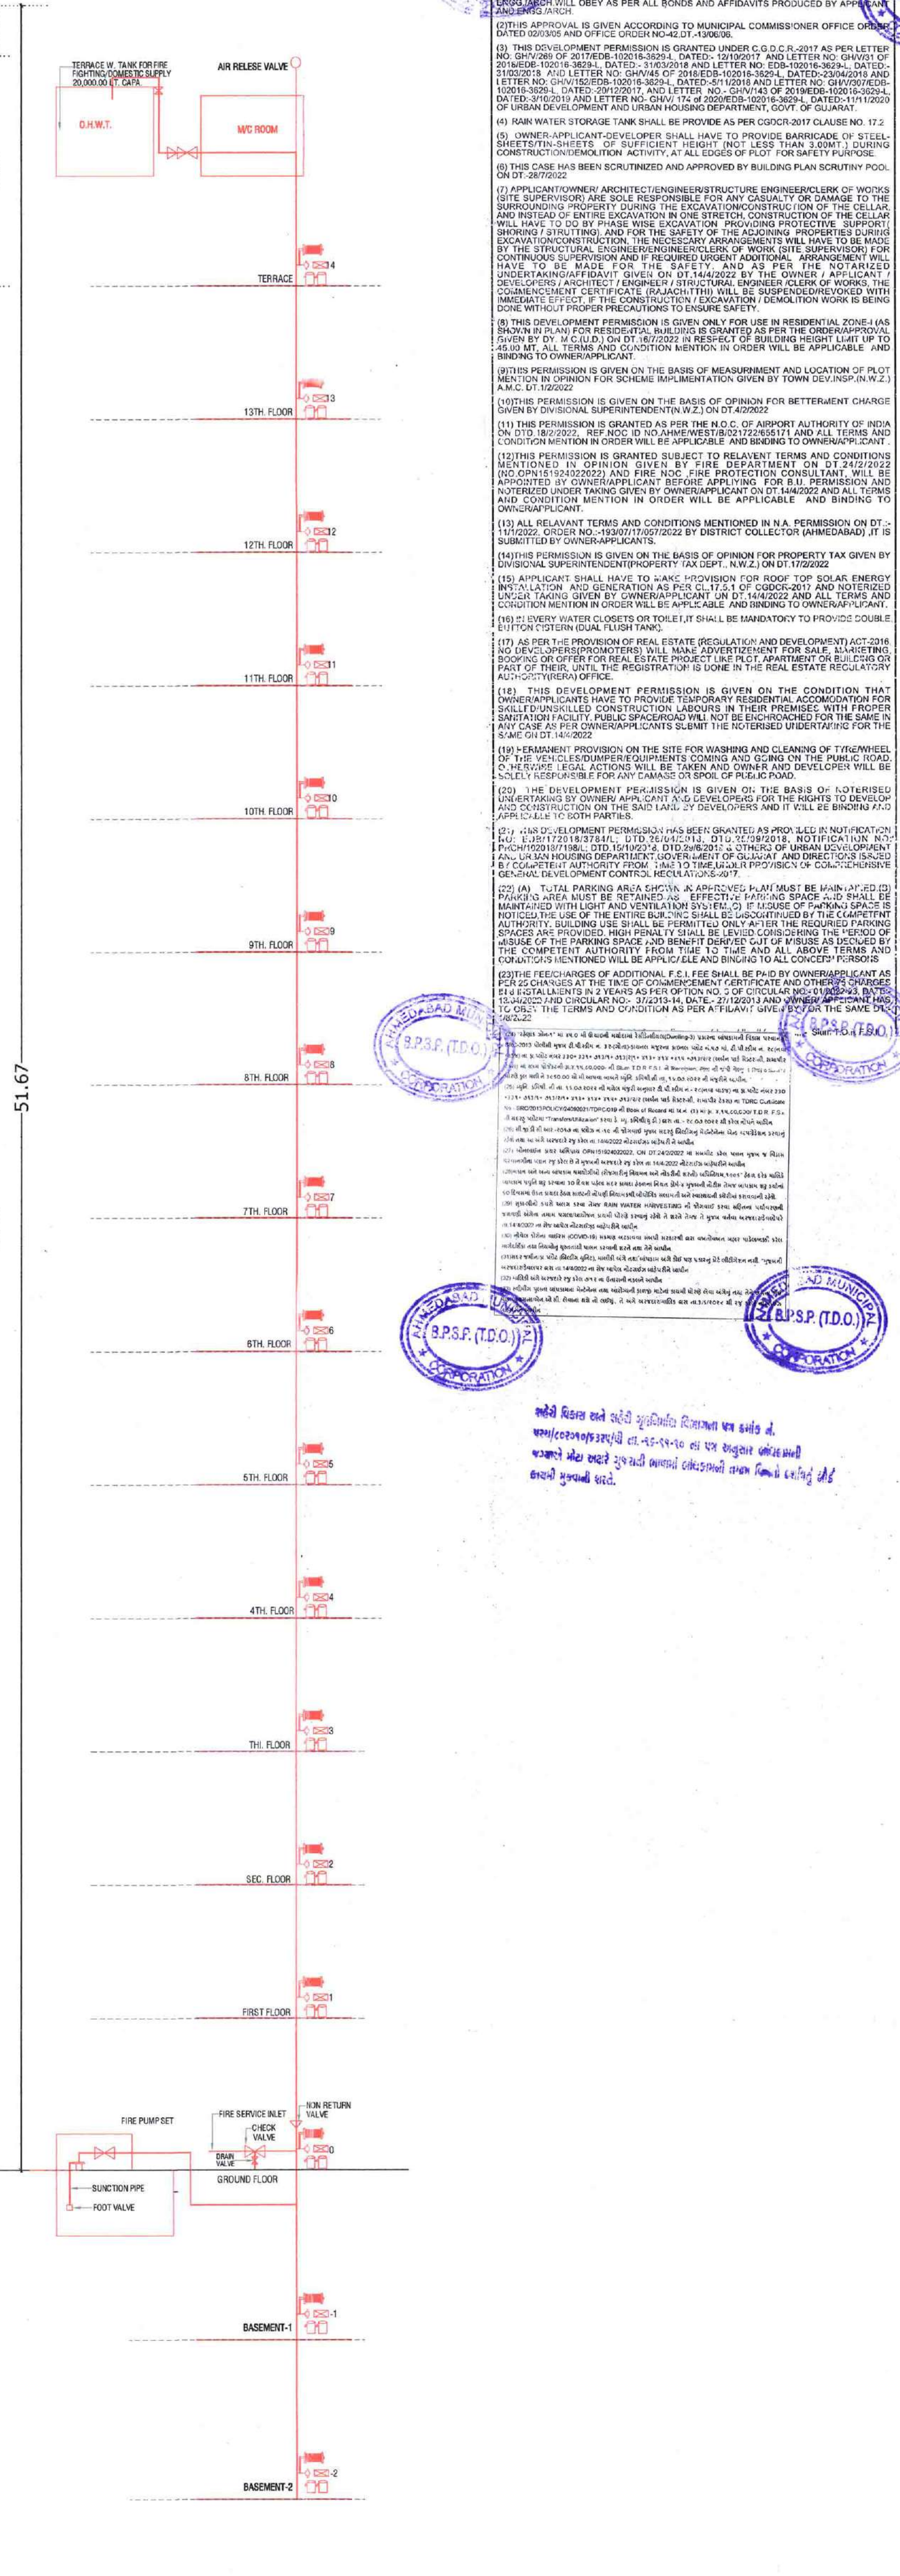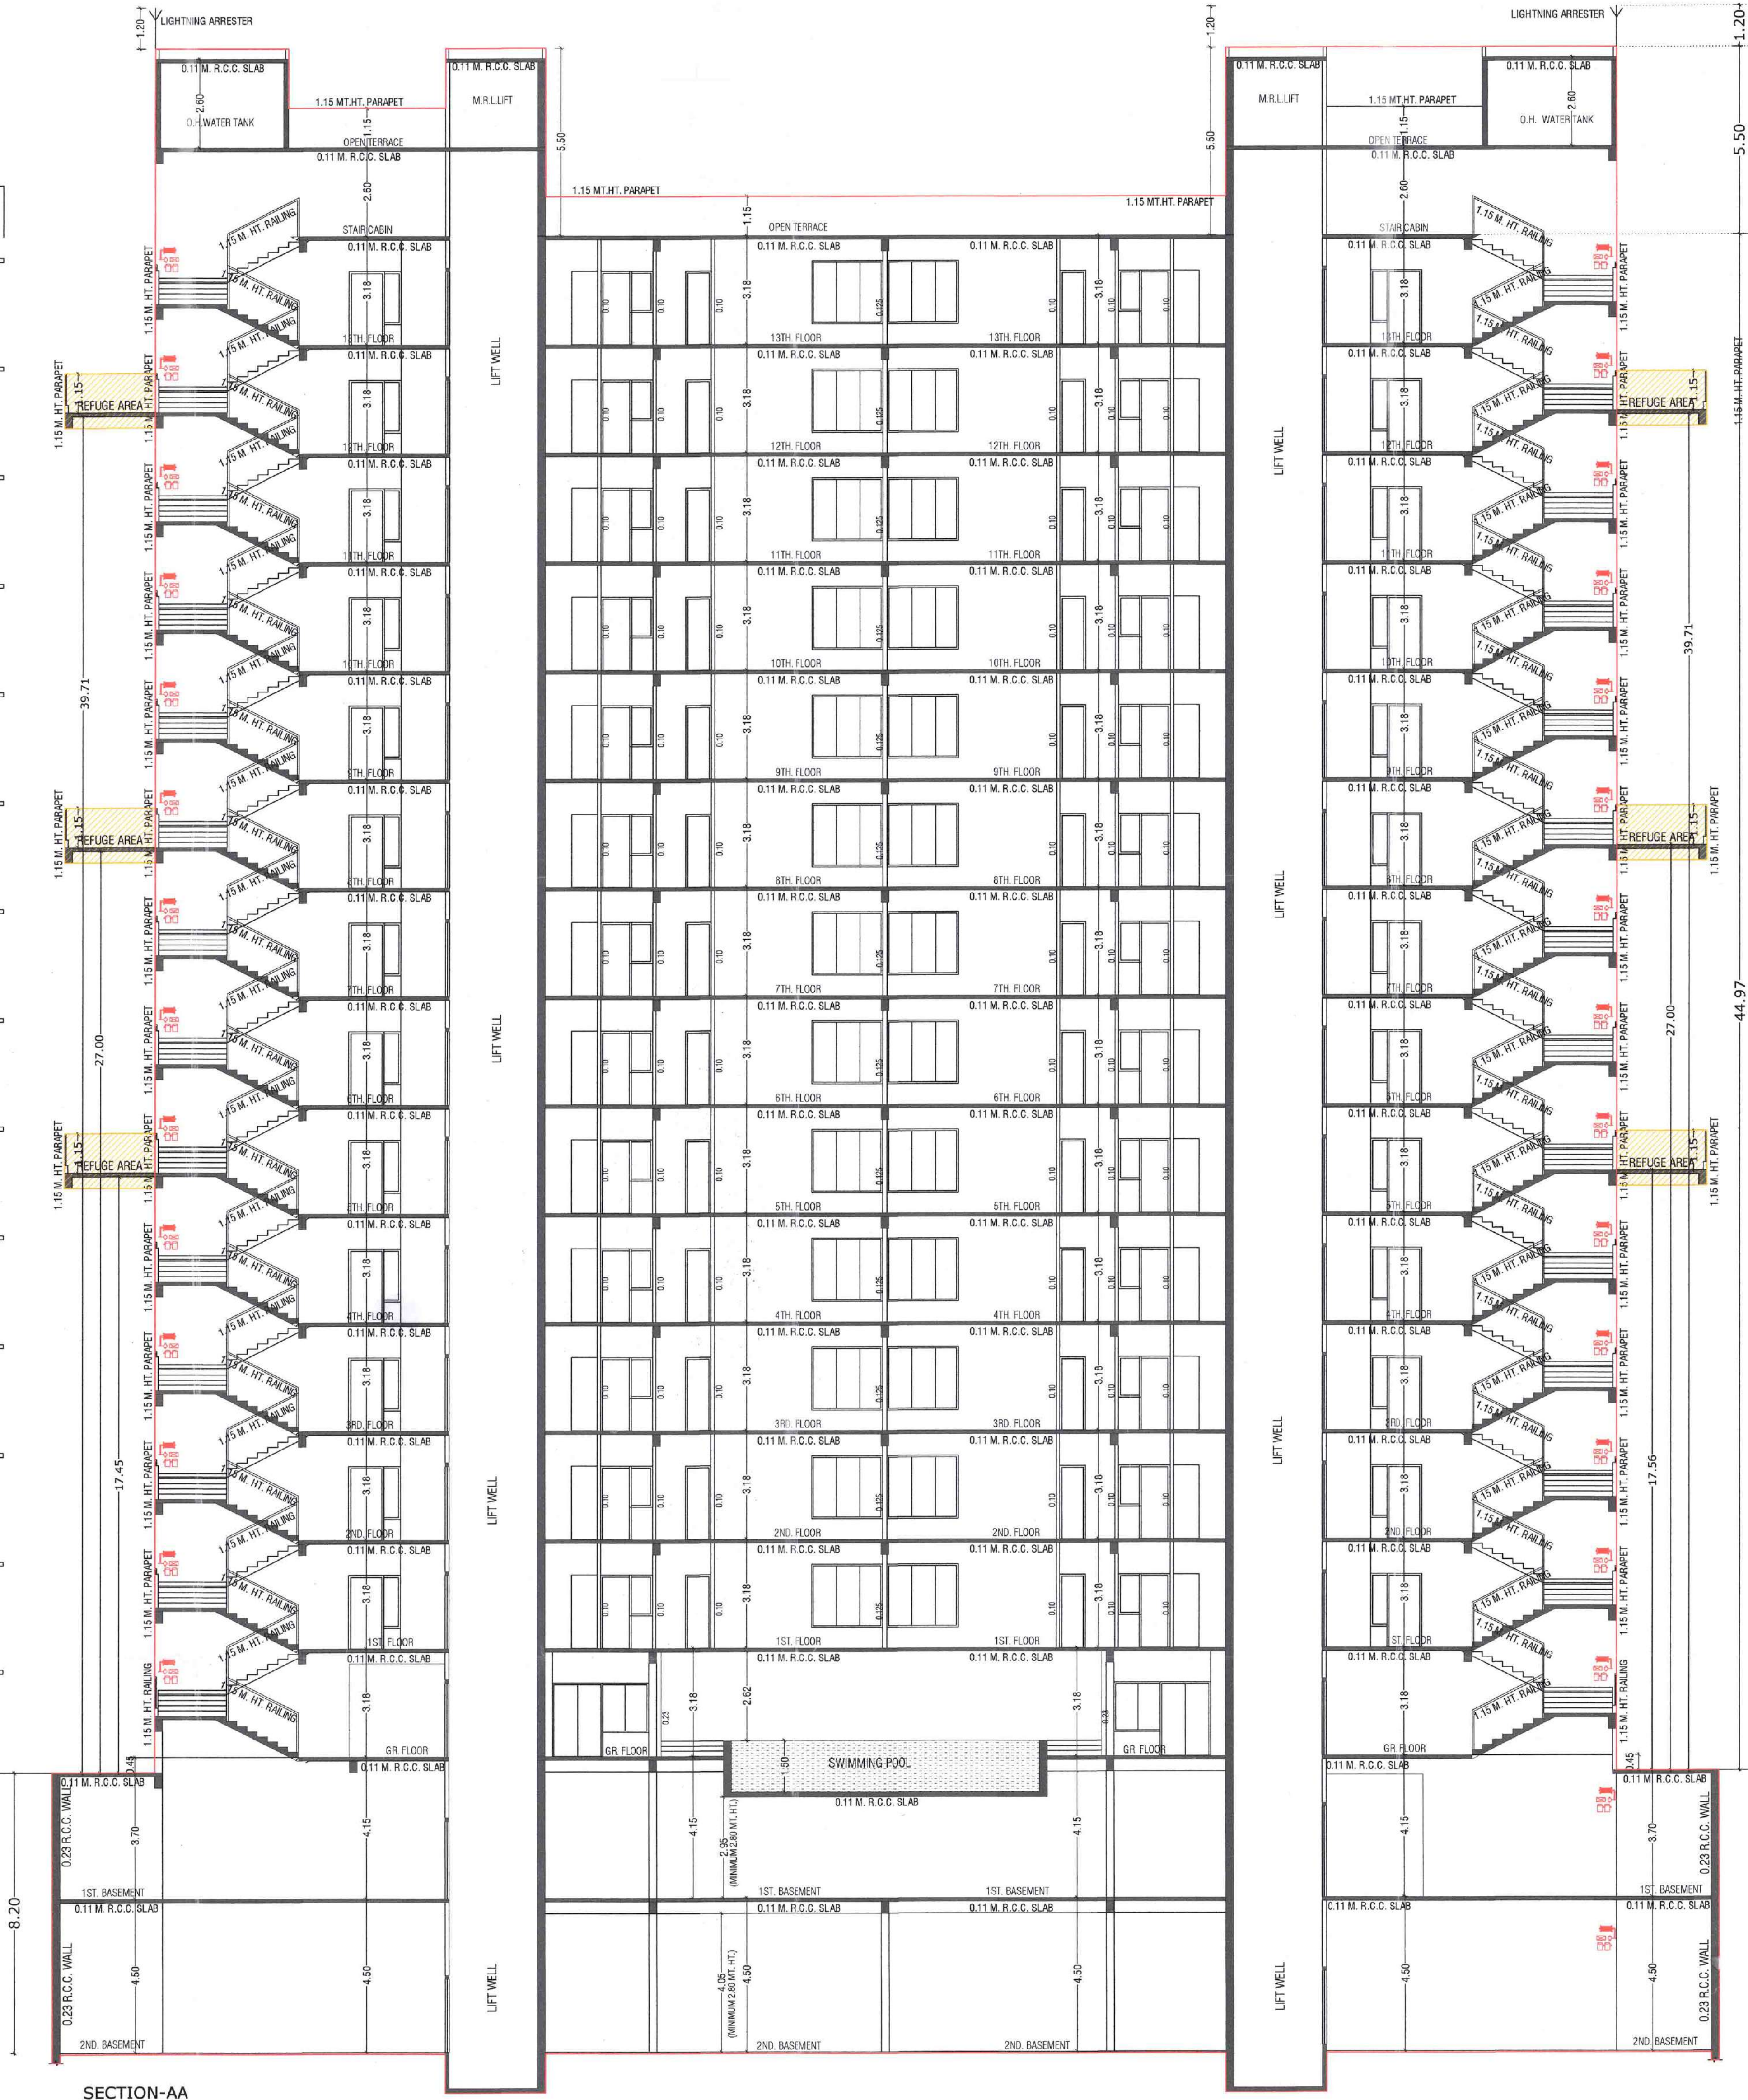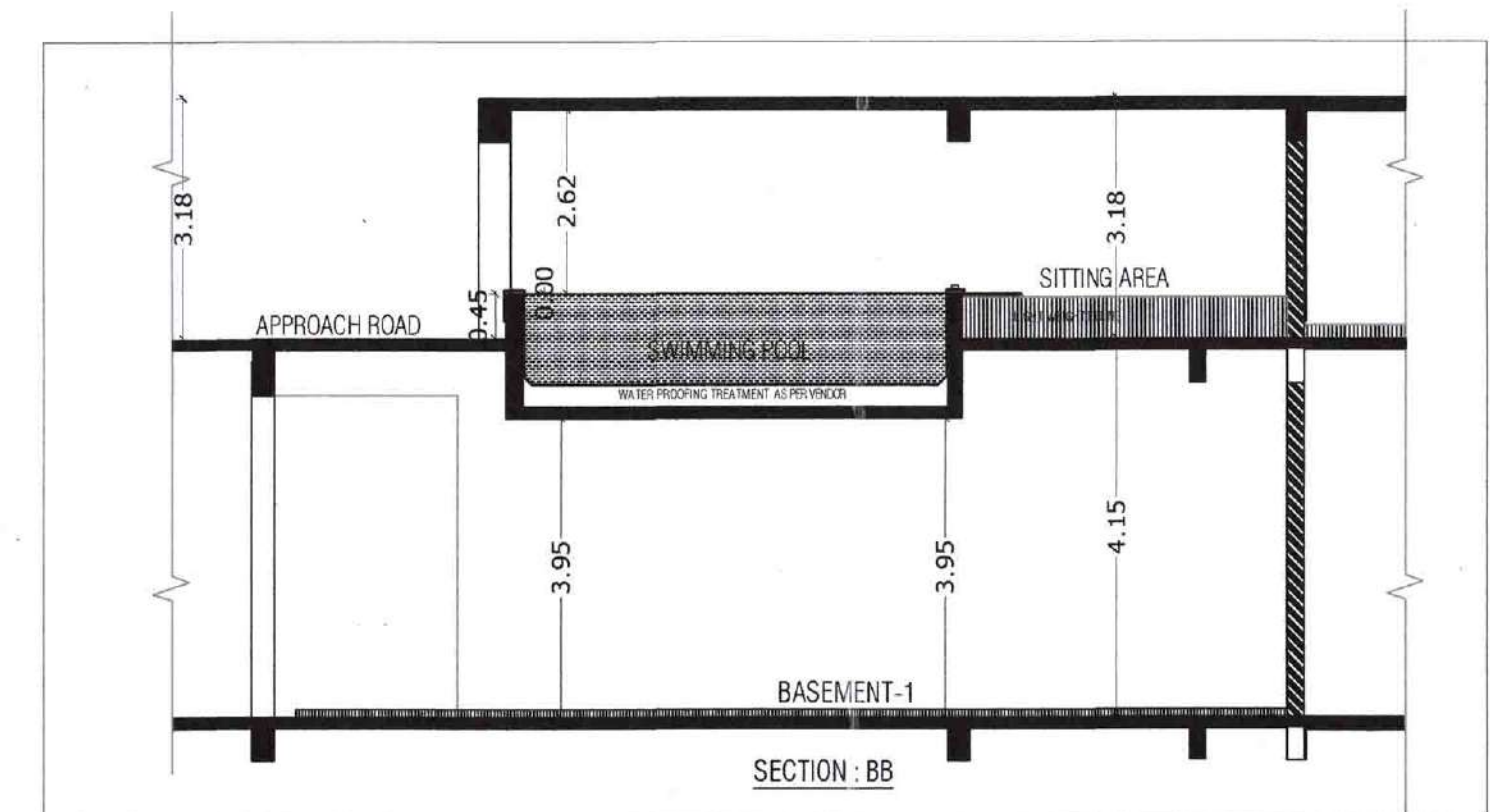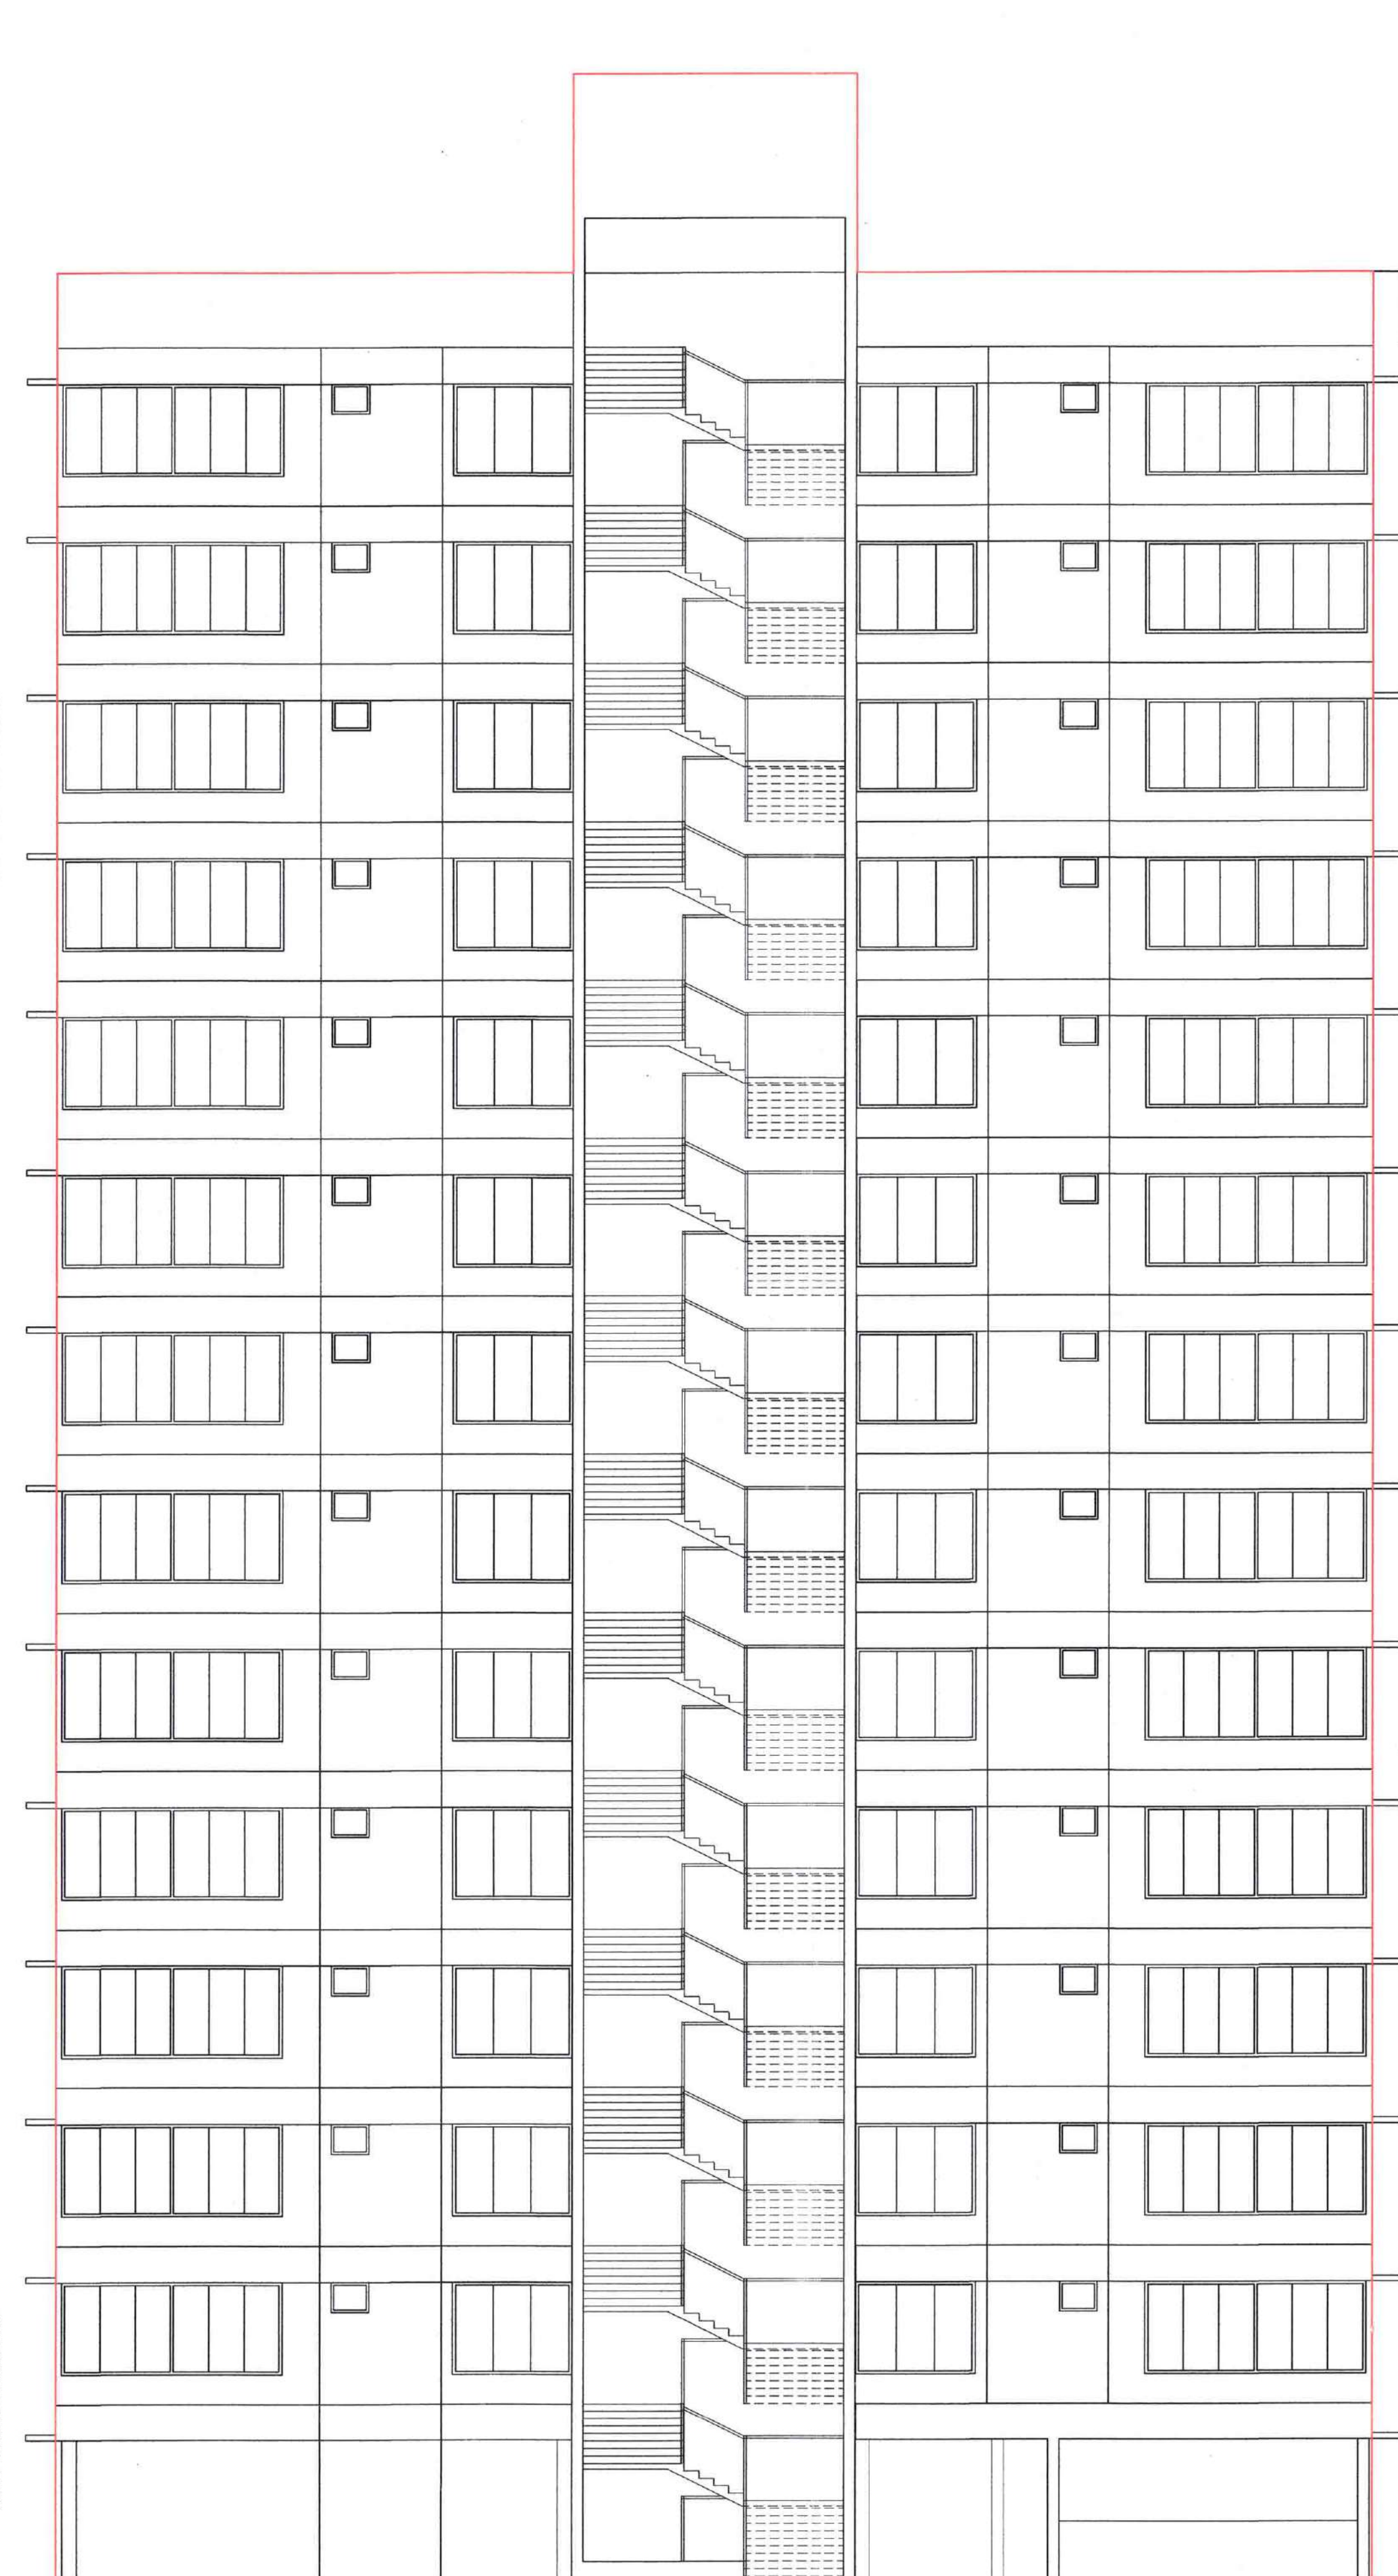

PLAN SHOWING PROPOSED RESIDENCE BUILDING ON F.P. NO. 57 OF T.P.S. NO. 32 (GOT) FINAL SANCTIONED (REVENUE SURVEY NO. 93/4, (O.P. NO. 157) OF VILLAGE / MOJE: 607A, TALUKA: GHATLODA, DISTRICT: AHMEDABAD

Table with 3 columns: DOOR, WINDOWS, and VENTILATION. It lists specifications for various openings, including sizes and materials.

COLOUR NOTE - PROPOSED WORK, PROPOSED DRAINAGE. RCC STAIR DETAIL: WIDTH = 2.00 MT, TREAD = 0.30 MT, RISE = 0.16 MT.

Table with 2 columns: BUILT UP AREA CALC. (STAR CABIN) and BUILT UP AREA CALC. (WATER TANK & M.L.LIFT). It provides area calculations for different parts of the building.

Professional stamps and signatures for Hitesh R. Patel (C.O.W) and Ninkumar R. Patel (S.O.R).

Professional stamps and signatures for G.P. Shah (OWNER) and Jayesh D. Desai (DEVELOPER).

Professional stamps and signatures for G.P. Shah (ENGINEER) and Jayesh D. Desai (STRUC. ENG.).

Official stamps from the Ahmedabad Municipal Corporation and other regulatory bodies, along with dates and project details.