

Rev. 604
date: 08/06/2002
APPROVED SUBJECT TO CONDITION
APPROVED UNDER COMMENCEMENTS
CERTIFICATE NO. C/P/02/02


Building Inspector
Asst. Engineer P.M.C.



Building Inspector
Assistant Engineer P.M.

FLOOR	BUILT UP AREA RESI.	LIFT	TENTS, NO.
GROUND	0.00		0
FIRST	446.93		2
SECOND	1145.96		5
THIRD	1145.96		5
FOURTH	1145.96	14.25 S.Q.M.	5
FIFTH	1145.65		5
SIXTH	1145.65		5
SEVENTH	1145.65		5
TOTAL	7320.85		38.00

FORM OF STATEMENT 2 Sr. No.9 (a) (iii) Proposed Building (UDCPR-2020)	WING	BUILT UP AREA	LIFT	TENTS NO
	BUILDING - A	7341.79	3.35	16
	WING - B	2920.89	14.25	38
	WING -C	235.79	00.00	00
	TOTAL	10498.47	17.60	54.00

PROPOSED F.S.I STATEMENT IN SQ.M.- BUILDING - A			
FLOOR	BUILT UP RESI	LIFT	TESTS NO
FIRST	385.28		2
SECOND	385.28		2
THIRD	659.10		4
FOURTH	513.28	3.35	4
FIFTH	515.05		2
SIXTH	240.90		2
SEVENTH	240.90		
TOTAL	2941.79	3.35	16.00

F.S.STATEMENT-WING -C		
FLOOR	BUILT UP	HT.
GROUND FLOOR	99.20	7.25 M
FIRST FLOOR	135.59	
TOTAL	235.79	

PARKING STATEMENT ~ UDPCR-2020		REQUIRED	PROVIDED
BUILDUP AREA	CAR SCOOTER	CAR	SCOOTER
TECHNICAL AREA CARPET	01	05	00
(PROPOSED 400.00 SQ.M)	(FOR 2 TENSIMENT)		
TECHNICAL AREA CARPET	01	03	54
(PROPOSED 140.00 SQ.M)	(FOR 1 TENSIMENT)		162
TECHNICAL AREA CARPET	02	03	00
(PROPOSED 54 TENSIMENT)	(FOR 1 TENSIMENT)		
TOTAL PARKING			54 NOS.
VISITOR PARKING 5%			03 NOS.
			8 NOS.
			17 X 12.50
			570 X 2.00
			712.50
			340.00

STP CALCULATION :-

TOTAL TENA. = 54 TENA.

NO OF FLATS X 135 LT RS PER DAY X 5 PERSON =
54 X 135 X 5 = 36,450.00 (37,000.00)

37,000.00 X 0.90 = 33,300.00 (33.30 KLD)

PROPOSED CAP= 34 CUM/DAY

WATER REQUIREMENT:-

FOR RESI. = 135 LL/DAY/PERSON
= (5Henna x 5) x 135 = 36,450.00 LIT.

SAY = 37,000.00 LIT.

= 37,000.00-50,000.00 (FIRE) = 87,000.00 LIT.

O/H WATER TANK CAP. = say 87,000.00 LIT.


UNDER GROUND SUMP WITH CAP=1.50 X 37,000.00 LIT.

UNDER GROUND SUMP WELL CAP = 55,500.00 LIT.

ADD FOR FIRE = 50,000.00-55,500.00 LIT.
= 1,05,500.00 LIT.

TENEMENT STATEMENT (CARPET AREA)			
FLOOR	80-150	ABOVE 150	TOTAL
FIRST	6	0	6
SECOND	6	0	6
THIRD	6	0	6
FOURTH	6	0	6
FIFTH	6	0	6
SIXTH	6	0	6
SEVENTH	2	0	2
TOTAL	38.00	0.00	38.00

TENEMENT STATEMENT	WING A (CARPET AREA)		ABOVE 150	TOTAL
FLOOR	80-150			
FIRST	2	0	2	
SECOND	2	0	2	
THIRD	4	0	4	
FOURTH	4	0	4	
FIFTH	2	0	2	
SIXTH	2	0	2	
SEVENTH	0	0	0	
TOTAL	16.00	0.00	16.00	

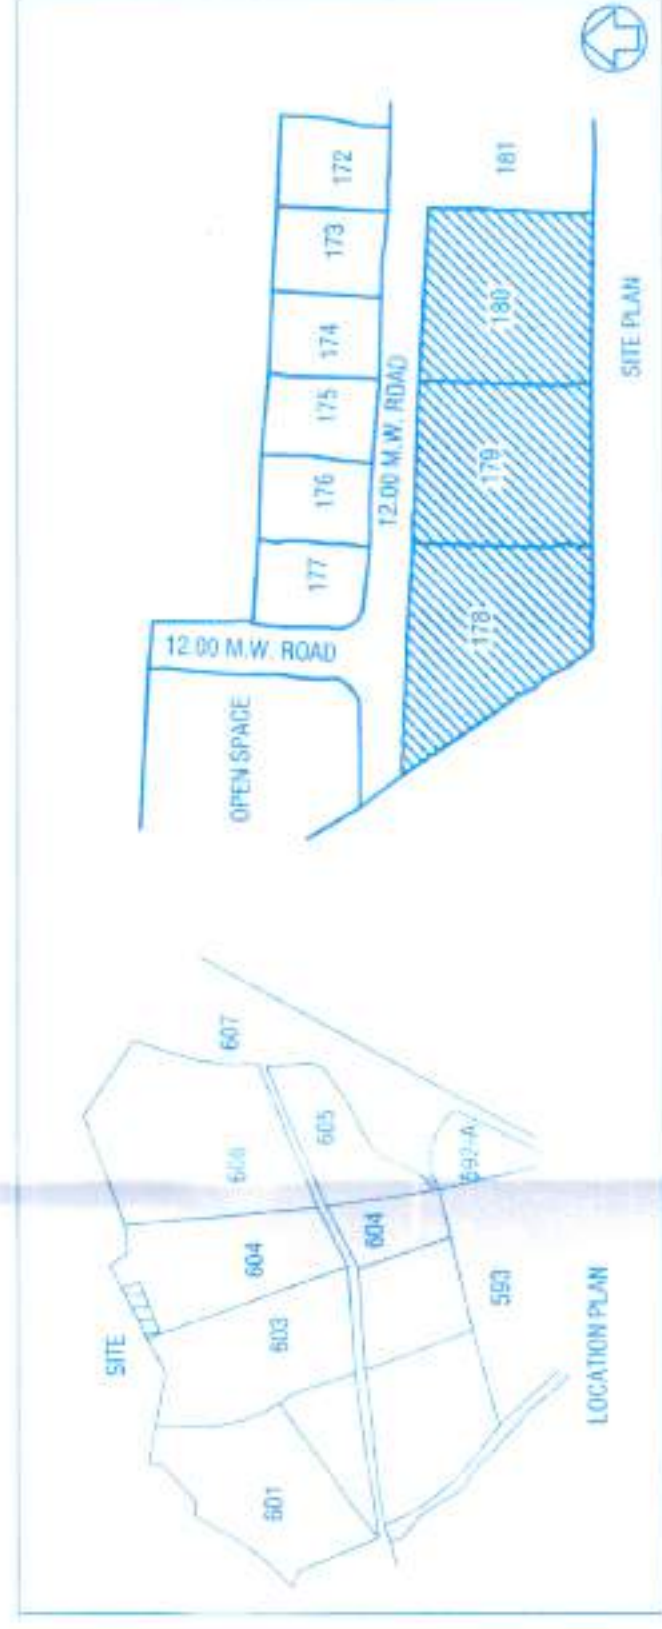

PLOT AREA CALCULATION SCALE 1:500


PLOT AREA CALCULATION AFTER AMALGAMATION

A) $(41.00 - 40.75) \times 150.474 \times 0.50 = 6.1506250$ M

B) $20,00 \times 2,60 \times 0,50$ = 26,00 SO. M.

TOTAL PLOT AREA
= 6,176.62 SQ. M.

TOTAL PLOT AREA

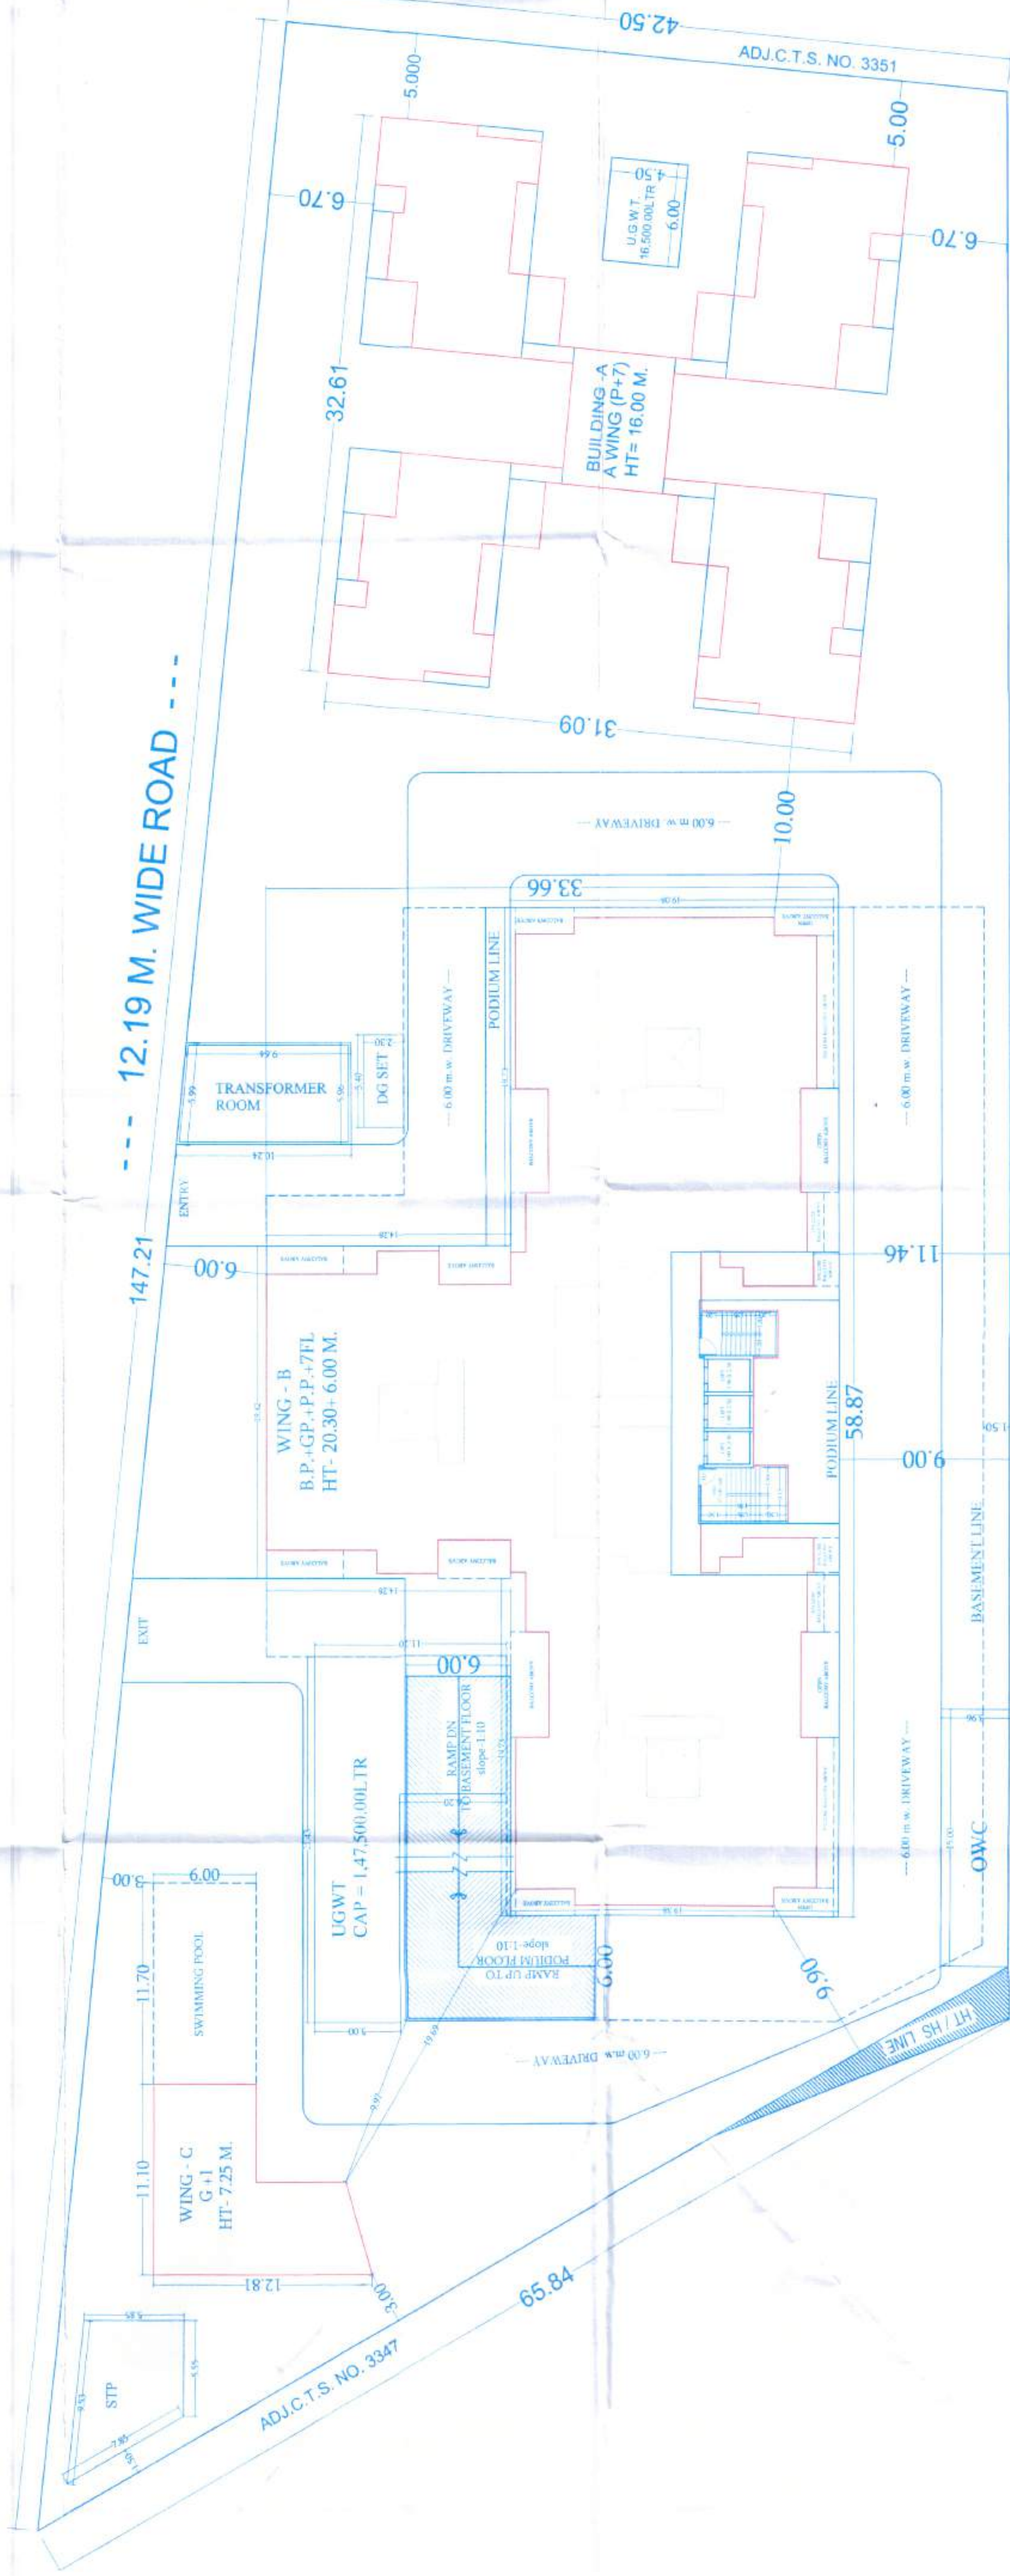TOTAL PLOT AREA
= 6,176.62 SQ. M.

ADJ.C.T.S. NO. 609

100 00

LAYOUT PLAN
SCALE :- 1:200