


SCHEDULE OF OPENING:			
NAME	LENGTH	HEIGHT	NOS.
V	0.82	0.90	24
W	1.52	1.20	24
W	2.21	1.20	6

Building	USE	Permitted Change (Trade Off)		PPR. RATIO
		REQ. RATIO	NO. OF TERRAIN/AREA	
RESIDENT	Residential	car	Scoutor	Scoutor
AL	Residential	0	6	0.00
Total		-	-	0.00
parking(5%)	-	-	-	0.00
Total		-	-	0.00


Building	USE	Permitted Change As Per Multiplying Factor 1.00		Status
		Gardim	Scoutor	
Residential	Residential	Gardim	Scoutor	OK
Total		0	0	OK

BUILDING	FLOORS	DRAINING PSI AREA			PSI AREA			RESIDENTIAL			LIFT	LIFTWELL	DUCT	VENT SHAFT	Other Deduction	TOTAL
		COMM.	RESID.	IND.	COMM.	RESID.	IND.	SPECIAL	MEZZ.	BALCONY PROP.						
RESIDENTIAL	SECOND FLOOR	0.00	0.00	0.00	0.00	162.59	0.00	0.00	0.00	0.00	0.00	0.00	8.00	0.00	0.00	168.59
	RESIDENTIAL	0.00	0.00	0.00	0.00	365.22	0.00	0.00	0.00	387.7	0.00	13.00	0.00	0.00	0.00	343.22
	RESIDENTIAL	0.00	0.00	0.00	0.00	289.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	289.01
RESIDENTIAL	Total	0.00	0.00	0.00	0.00	896.82	0.00	0.00	0.00	387.7	0.00	24.00	0.00	0.00	0.00	816.82



Layer	Material	Thickness (mm)	Modulus (GPa)	Poisson's Ratio	Density (g/cm³)
D1	Carbon Fiber	0.125	140	0.28	1.6
D2	Carbon Fiber	0.125	140	0.28	1.6
D3	Carbon Fiber	0.125	140	0.28	1.6
D4	Carbon Fiber	0.125	140	0.28	1.6
D5	Carbon Fiber	0.125	140	0.28	1.6
D6	Carbon Fiber	0.125	140	0.28	1.6

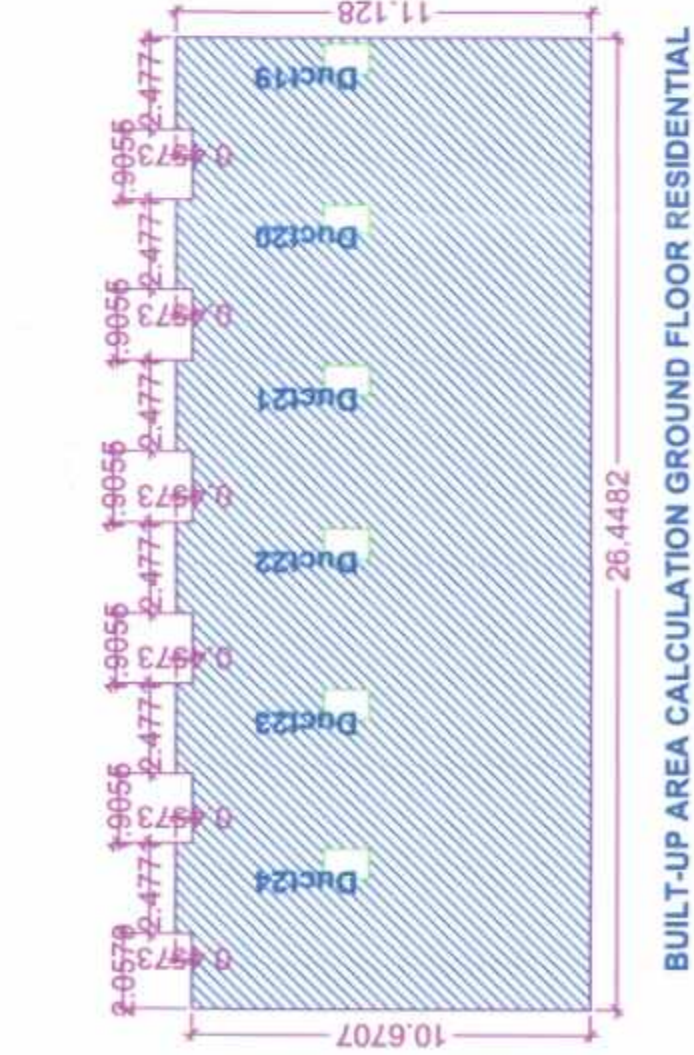

A. List of the 10 most important items	
Rank	Item
1	Food
2	Water
3	Shelter
4	Health
5	Education
6	Transportation
7	Communication
8	Recreation
9	Security
10	Environment

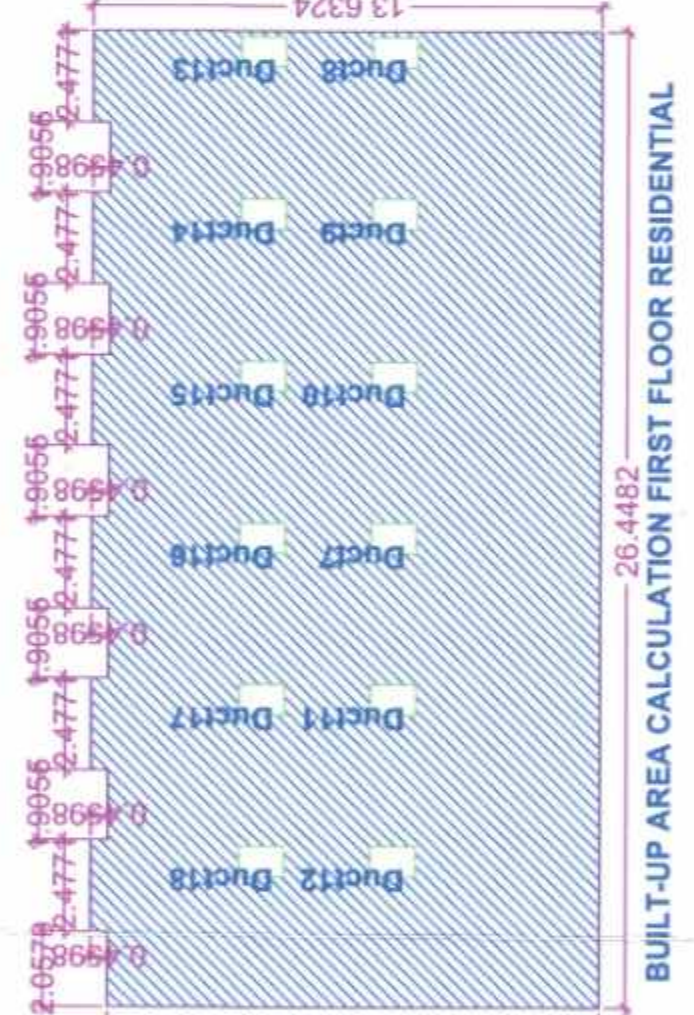

The diagram illustrates the cross-section of a building's roof assembly. It shows four distinct layers, each labeled "Ducts". The thicknesses of these layers are specified as 0.4998, 0.4973, 0.4998, and 0.4998 respectively from top to bottom. The total thickness of the entire assembly is given as 26.4482.

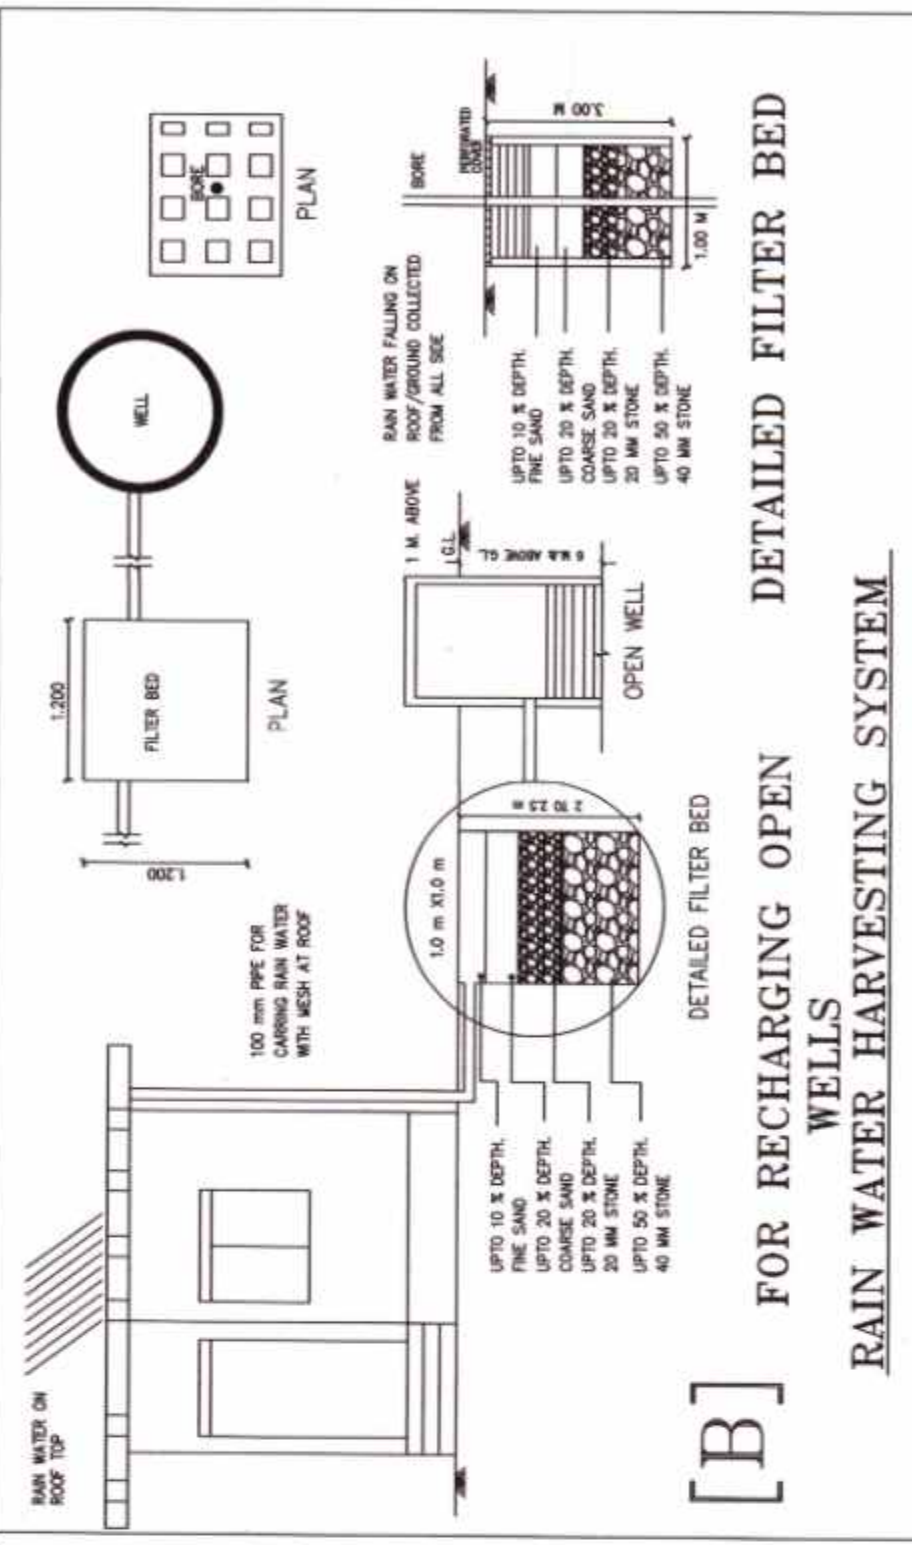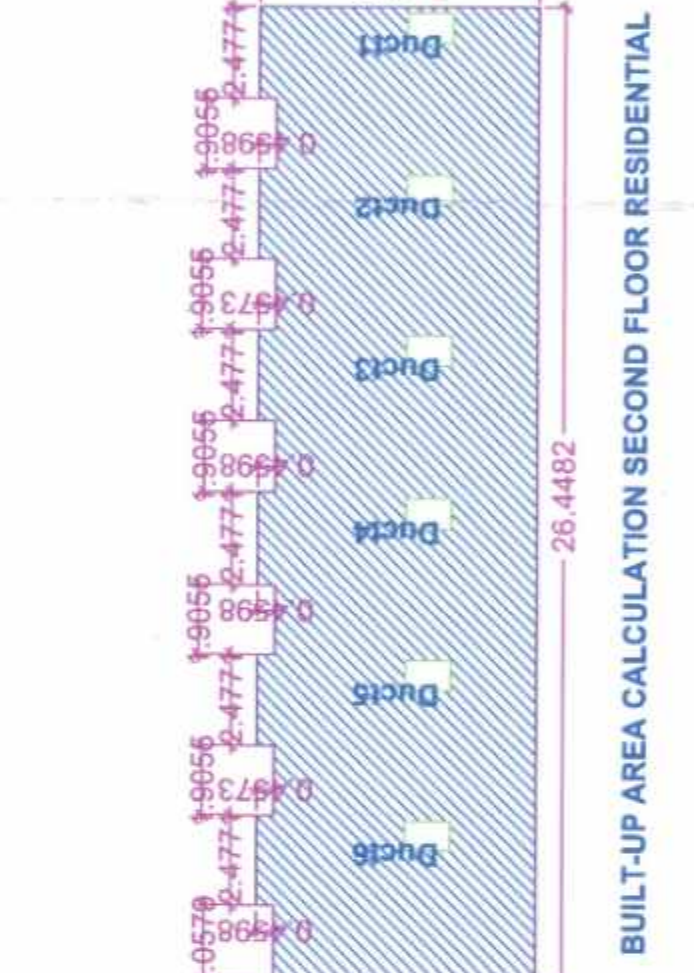

Carpet Area Table						Total Carpet Area
Building Name	Floor Name	Carpet name	Tenement No	Carpet Area	Enclosed Balcony Area	
RESIDENTIAL	SECOND FLOOR	3BHK	3	105.64	0.00	105.64
RESIDENTIAL	SECOND FLOOR	3BHK	6	105.64	0.00	105.64
RESIDENTIAL	SECOND FLOOR	3BHK	9	105.64	0.00	105.64
RESIDENTIAL	SECOND FLOOR	3BHK	12	105.64	0.00	105.64
RESIDENTIAL	SECOND FLOOR	3BHK	15	106.80	0.00	106.80
RESIDENTIAL	SECOND FLOOR	3BHK	18	105.64	0.00	105.64

		FSI DETAILS					Drawing Value
8 Index	Basic FSI (on total no 1)	Premium FSI (on serial no 1)	Incentive FSI for green building (on basic FSI)	Ancillary Area 46% (20-39-43)	Ancillary Area 40% (30-39-43)	Inclusion Housing (20%) if Applicable	
9.1	Permissible	1.10	0.30	0.30	0.00	1.70	0.00
9.2	Existing	0.00	0.00	0.00	0.00	0.00	0.00
9.3	Excess						
9.4	Permissible	1.10	0.30	0.30	0.00	0.00	0.00
9.5	Consumed						
9.6	Permissible	571.12	156.30	156.30	0.00	1229.59	0.00
9.7	Consumed				343.87	0.00	0.00
9.8	Excess						
9.9	Permissible	571.12	0.00	0.00	239.70	819.82	0.00
9.10	Consumed						812.82
9.11	Excess						
9.12	Permissible	1.09	0.00	0.00	0.00	1.09	0.00
9.13	Consumed						

