


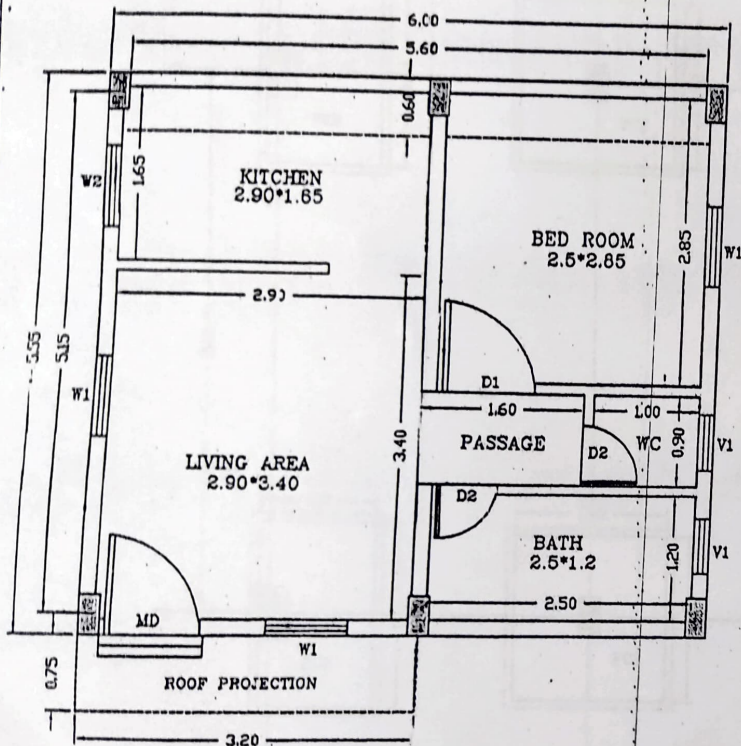

PLAN AT SILL LEVEL

SCHEDULE OF OPENINGS	
DOORS:	
MD	0.9m x 2.1m
D1	0.9m x 2.1m
D2	0.75m x 2.1m
OPI	0.9m
WINDOWS:	
W1	0.9m x 1.2m
W2	0.75m x 0.6m
VENTILATORS:	
V1	0.45m x 0.45m
AREA STATEMENT:	
CARPET AREA	27.11sqm
PLINTH AREA	33.36sqm

Approved

- Notes:
1. Do not scale the drawing. Follow figured Dimension. All Dimensions are in Metres.
 2. Contractors should verify all the dimensions on site prior to construction.
 3. Grade of concrete shall be M20.
 4. All reinforcements shall be HYSD bars of grade Fe500.
 5. SDC of soil is considered as 15T/sqmt at a depth of 1.5m from NGL.
 6. Any discrepancies or changes noted in the drawings should be brought to the notice of the concerned Engineer.

ASSISTANT EXECUTIVE ENGINEER
KSDB NO - SUB.DIV

EXECUTIVE ENGINEER
KSDB NO - DIV

TECHNICAL DIRECTOR -
KSDB

COMMISSIONER,
KSDB, BANGALORE

CLIENT:
KARNATAKA SLUM DEVELOPMENT BOARD

PROJECT:
CONSTRUCTION OF GF DUS UNDER
PMAY - HFA SCHEME

TITLE:
PLAN AT SILL LEVEL

DESIGNED BY: *Syeda Nurath*
Syeda Nurath Fathima, AE, KSCB
(B.E., M.Tech. in Structural Engineering)

CHECKED BY: *Principal*
Maharaja Institute of Technology Mysore
BANGALORE
Scribble: Nitro Seal
Mandya District - 571438