


before the work is started. The Non-agricultural assessment shall be paid at the site that may be fixed by the Collector, under the Land Revenue Code and Rules there under.

Attention is drawn to the notes Accompanying this Intimation of Disapproval.

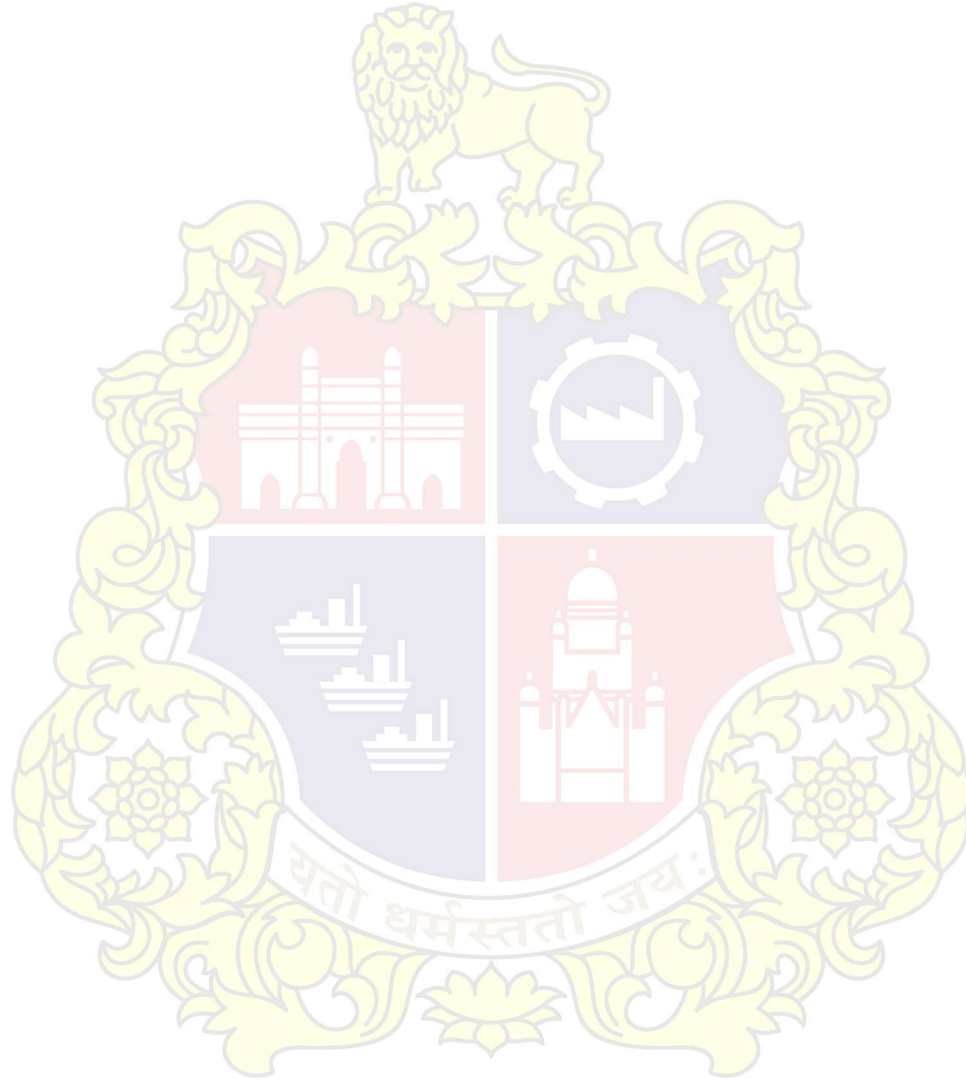

No. EB/CE/

/BS

/A/

NOTES

- 1) The work should not be started unless objections are complied with
- 2) A certified set of latest approved plans shall be displayed on site at the time of commencement the work and during the progress of the construction work.
- 3) Temporary permission on payment of deposit should be obtained any shed to house and store for construction purpose, Residence of workmen shall not be allowed on site. The temporary structures for storing constructional material shall be demolished before submission of building completion certificate and certificate signed by Architect submitted along with the building completion certificate.
- 4) Temporary sanitary accommodation on full flushing system with necessary drainage arrangement should be provided on site workers, before starting the work.
- 5) Water connection for constructional purpose will not be given until the hoarding is constructed and application made to the Ward Officer with the required deposit for the construction of carriage entrance, over the road side drain.
- 6) The owners shall intimate the Hydraulic Engineer or his representative in Wards atleast 15 days prior to the date of which the proposed construction work is taken in hand that the water existing in the compound will be utilised for their construction works and they will not use any Municipal Water for construction purposes. Failing this, it will be presume that Municipal tap water has been consumed on the construction works and bills preferred against them accordingly.
- 7) The hoarding or screen wall for supporting the depots of building materials shall be constructed before starting any work even though no materials may be expected to be stabled in front of the property. The scaffoldings, bricks metal, sand preps debris, etc. should not be deposited over footpaths or public street by the owner/ architect /their contractors, etc without obtaining prior permission from the Ward Officer of the area.
- 8) The work should not be started unless the manner in obviating all the objection is approved by this department.
- 9) No work should be started unless the structural design is approved.
- 10) The work above plinth should not be started before the same is shown to this office Sub-Engineer concerned and acknowledgement obtained from him regarding correctness of the open spaces & dimension.
- 11) The application for sewer street connections, if necessary, should be made simultaneously with commencement of the work as the Municipal Corporation will require time to consider alternative site to avoid the excavation of the road an footpath.

- 12) All the terms and condition of the approved layout /sub-division under No. of should be adhered to and complied with.
- 13) No Building /Drainage Completion Certificate will be accepted non water connection granted (except for the construction purpose) unless road is constructed to the satisfaction of the Municipal Commissioner as per the provision of Section 345 of the Bombay Municipal Corporation Act and as per the terms and conditions for sanction to the layout.
- 14) Recreation ground or amenity open space should be developed before submission of Building Completion Certificate.
- 15) The access road to the full width shall be constructed in water bound macadam before commencing work and should be complete to the satisfaction of Municipal Commissioner including asphaltting lighting and drainage before submission of the Building Completion Certificate.
- 16) Flow of water through adjoining holding or culvert, if any should be maintained unobstructed.
- 17) The surrounding open spaces around the building should be consolidated in Concrete having broke glass pieces at the rate of 12.5 cubic meters per 10 sq. meters below payment.
- 18) The compound wall or fencing should be constructed clear of the road widening line with foundation below level of bottom of road side drain without obstructing flow of rain water from adjoining holding before starting the work to prove the owner's holding.
- 19) No work should be started unless the existing structures proposed to be demolished are demolished.
- 20) The Intimation of Disapproval is given exclusively for the purpose of enabling you to proceeds further with the arrangements of obtaining No Objection Certificate from the Housing Commissioner under Section 13 (h) (H) of the Rent Act and in the event f your proceeding with the work either without an intimation about commencing the work under Section 347(1) (aa) or your starting the work without removing the structures proposed to be removed the act shall be taken as a severe breach of the conditions under which this Intimation of Disapproval is issued and the sanctioned will be revoked and the commencement certificate granted under Section 45 of the Maharashtra Regional and Town Planning Act 1966, (12 of the Town Planning Act), will be with drawn.
- 21) If it is proposed to demolish the existing structures be negotiations with the tenant, under the circumstances, the work as per approved plans should not be taken up in hand unless the City Engineer is satisfied with the following:-
 - i. Specific plans in respect of evicting or rehousing the existing tenants on hour stating their number and the areas in occupation of each.
 - ii. Specifically signed agreement between you and the existing tenants that they are willing to avail or the alternative accommodation in the proposed structure at standard rent.
 - iii. Plans showing the phased programme of constructions has to be duly approved by this office before starting the work so as not to contravene at any stage of construction, the Development control Rules regarding open spaces, light and ventilation of existing structure.

- 22) In case of extension to existing building, blocking of existing windows of rooms deriving light and its from other sides should be done first starting the work.
- 23) In case of additional floor no work should be start or during monsoon which will same arise water leakage and consequent nuisance to the tenants staying on the floor below.
- 24) The bottom of the over head storage work above the finished level of the terrace shall not be less than 1.20 Mt.and not more than 1.80 mt.
- 25) The work should not be started above first floor level unless the No Objection Certificate from the Civil Aviation Authorities, where necessary is obtained.
- 26) It is to be understood that the foundations must be excavated down to hard soil.
- 27) The positions of the nahanis and other appurtenances in the building should be so arranged as not to necessitate the laying of drains inside the building.
- 28) The water arrangement nut be carried out in strict accordance with the Municipal requirements.
- 29) No new well, tank, pond, cistern or fountain shall be dug or constructed without the previous permission in writing of the Municipal Commissioner for Greater Mumbai, as required in Section 381-A of the Municipal Corporation Act.
- 30) All gully traps and open channel drains shall be provided with right fitting mosquito proof made of wrought iron plates or hinges. The manholes of all cisterns shall be covered with a properly fitting mosquito proof hinged cast iron cap over in one piece, with locking arrangement provided with a bolt and huge screwed on highly serving the purpose of lock and the warning pipes of the rabbet pretested with screw or dome shape pieces (like a garden mari rose) with copper pipes with perfections each not exceeding 1.5 mm in diameter. The cistern shall be made easily, safely and permanently accessible be providing a firmly fixed iron ladder, the upper ends of the ladder should be earmarked and extended 40 cms above the top where they are to be fixed as its lower ends in cement concrete blocks.
- 31) No broken bottles should be fixed over boundary walls. This prohibition refers only to broken bottles to not to the use of plane glass for coping over compound wall.
- 32) a Louvres should be provided as required by Bye0law No. 5 (b)
b Lintels or Arches should be provided over Door and Windows opening
c The drains should be laid as require under Section 234-1(a)
d The inspection chamber should be plastered inside and outside.
- 33) If the proposed additional is intended to be carried out on old foundations and structures, you will do so as your own risk.