



Bangalore Electricity Supply Company Limited

(Wholly Owned by Govt. of Karnataka Undertaking)

No. EEE/NEL/AEE (O)/AE (T)/14-15/

Office of the

Executive Engineer (Ele)
C, O&M, Division, BESCOM,
Nelamangala

8484-85

9/12/14

413
181
(10)

To.

Sri. Ravi L. and Sons
at Sy no. 105/P2, P3 at Shivapuravillage
in O&M-II unit of D.B.Pura sub division

Sir,

Sub:-Electrification of Private Residential Layout of Sri. Ravi L.
and Sons at Sy no. 105/P2, P3 at Shivapura village
in O&M-II unit of D.B.Pura sub division

BESCOM is pleased to sanction power for Residential layout
developed by you at Shivapura village, D.B.Pura Sub-Division.

Power supply to the sites in the will be arranged only after
infrastructure is fully developed & will be taken over by BESCOM, only
after 25% of houses are constructed & supply available as per ES&D
code. The total number of sites is 67 nos. in the layout & power
requested is 416 Kws including street light water supply parks.
Clubhouse etc. & for any power requirement more than infrastructure
charges will have to be paid as per rules.

You are requested to Pay **Rs. 207588/-** as Supervision charges on
10% of the estimated cost Rs. 2075879/- Towards BESCOM portion. The
above work has to be taken up by you on Turnkey basis under self
execution under supervision of BESCOM.

The above amounts have to be paid at the office of Asst. Executive
Engineer (Ele.) BESCOM, D.B.Pura Sub-Division through D.D drawn in
favour of Asst. Executive Engineer (Ele.) BESCOM, D.B.Pura Sub-
division.

The work consists of the following:

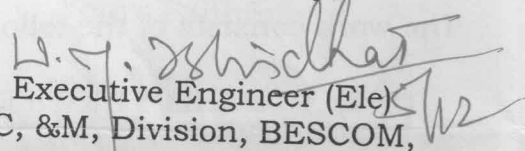
- To extend 11 KV line by using 9 mtrs support & Rabbit
Conductor to a distance of 1.3 KMtrs.
- To provide 4X100 KVA DTC
- To draw secondary 3 Phase 5 wire line to a distance of 4.5
KMtr by using Rabbit conductor.
- To provide Nos. 20 Nos. Street light fittings in the layout.

Handwritten signature and initials at the bottom right of the page.

- 1 The materials used shall confirm to ISI/BESCOM/KPTCL sections.
- 2 The entire Distribution system with connected equipment will be taken over by BESCOM after completion of works.
- 3 Guarantee shall be furnished for period of not less than one year for the materials used in the works as for the quality of the work carried out from the date of taking over of the line equipments by BESCOM.
- 4 Proof of having purchased the materials used for executing the works from the reputed firm will be verified wherever necessary.
- 5 BESCOM is not responsible in whatsoever manner regarding any of legal disputes that may arise at a later stage.
- 6 After payment of supervision charges Administrative Approval will be issued from this office & a work order will be issued by the Executive Engineer (Ele.) Nelamangala Division.
- 7 For all EHT & HT/LT lines passing through the layout safety clearance to be maintained (Statutory) of shifting of existing lines to be at your end.
- 8 The materials used shall confirm to ISI/BESCOM/KPTCL specification & materials Procured should be got inspected by TAQC staff Corparate office before commencement of work.
- 9 Any HT/LT lines existing in the premises to be shifted by you at own cost particularly abandoned IP set line & misuse is found you will be held responsible.
10. You should clear the outstanding arrears if any of the installations inside the layout area.
11. You should abide by the BESCOM electricity supply & distribution code 2004 in force from time with latest amendments particularly regarding MS buildings Street light etc. comes within the layout.

The above mentioned amount should be paid within One month from the date of this letter & payment certificate duly signed by the Asst. Executive Engineer (Ele.) D.B.Pura Sub-Division should be sent to this office for communicating approval to the estimate. Any delay beyond this would require review of the feasibility, which may please be noted.

Yours Faithfully,


Executive Engineer (Ele.)
C, & M, Division, BESCOM,
Nelamanagla.