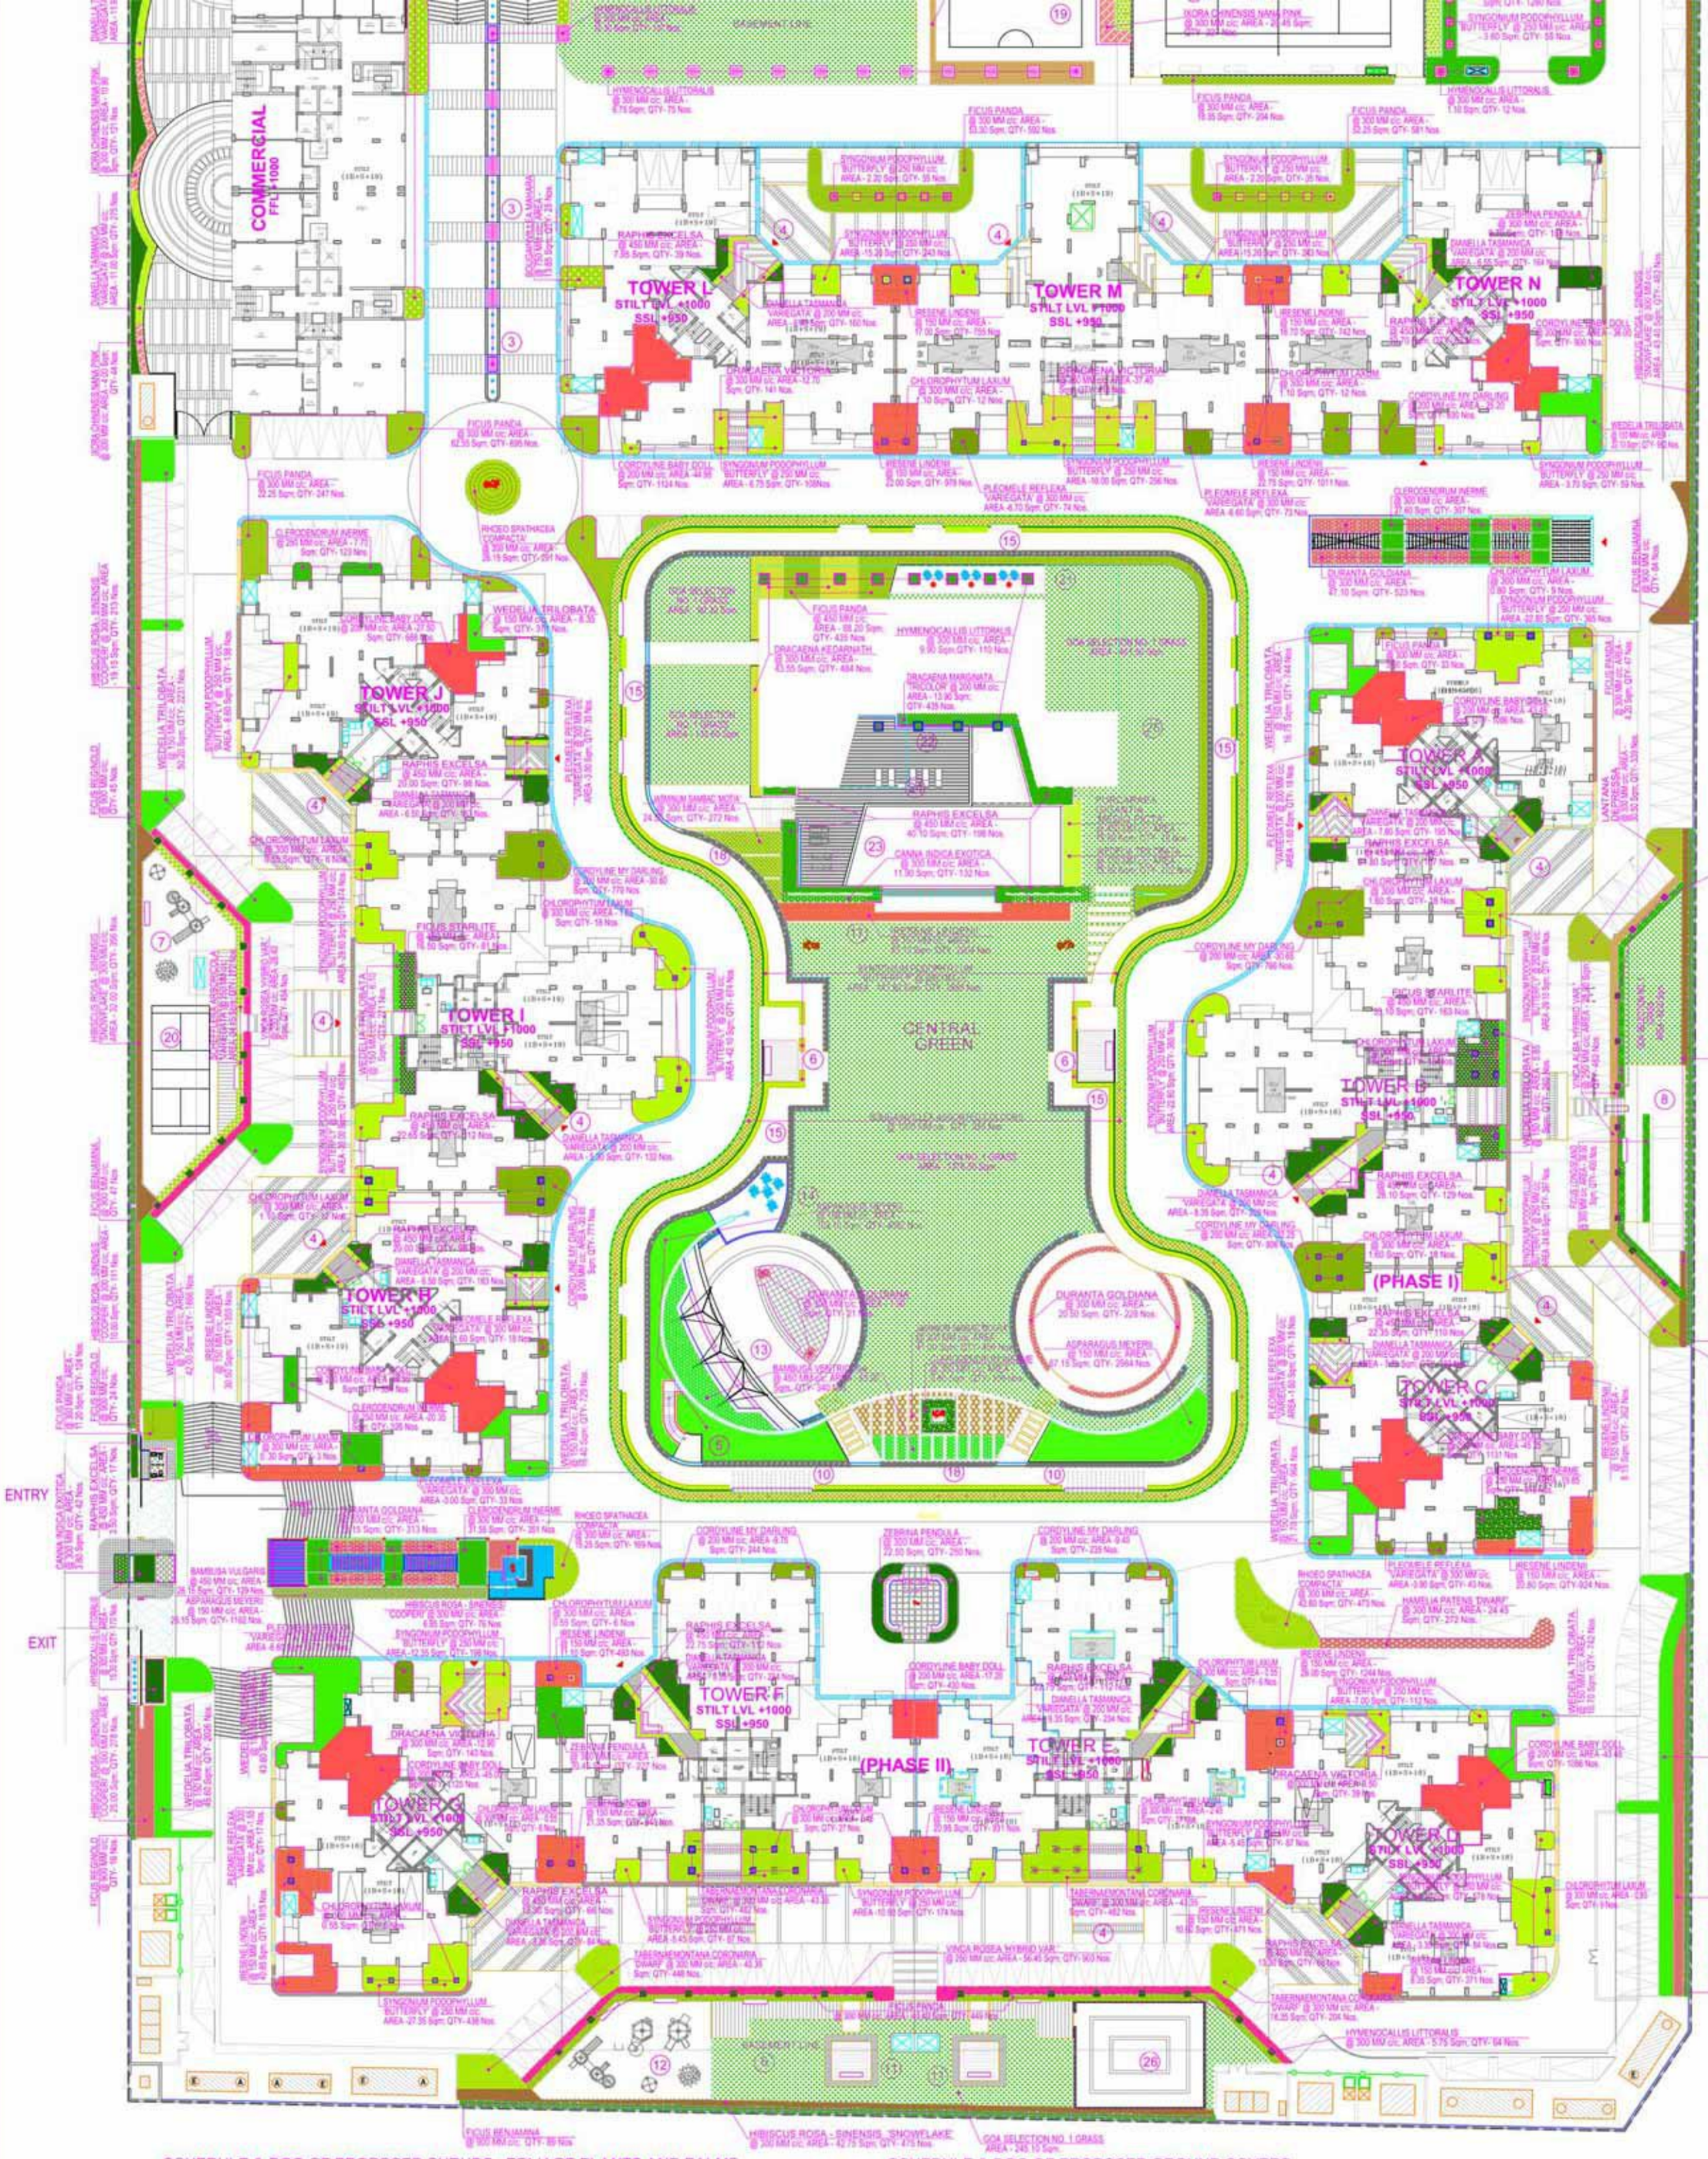

1. WITH SIGNAGE
3. LINEAR WATER FEATURE
4. DROP-OFF AREA
5. PALM COURT
6. ELDERS ZONE
7. KIDS PLAY AREA -1
8. CRICKET PRACTICE PITCH
9. SIGNAGE
10. SEATING UNDER PERGOLA
11. YOGA/ MEDITATION
12. KIDS PLAY AREA - 2 (NOS. 2)
13. AMPHITHEATER
14. WATER FEATURE
15. JOGGING TRACK
16. ENTRANCE PORTAL TO CLUB LAWN
17. SWIMMING POOL FEATURE WALL
18. FRAGRANCE GARDEN
19. HALF BASKETBALL COURT (TO BE SHIFTED IN FRONT GREEN AREA)
20. BADMINTON COURT
21. WATER FEATURE WITH FLOATING PALMS
22. POOL DECK
23. MAIN SWIMMING POOL (AREA -182.0 SQM)
24. KIDS POOL (AREA -28.7 SQM)
25. CLUB PARTY LAWN (AREA -564 SQM)
26. SKATING RINK

LAWN TENNIS

SCHEDULE & BOQ OF PROPOSED SHRUBS , FOLIAGE PLANTS AND PALMS

SR NO.	SYMBOL	BOTANICAL NAME	COMMON NAME	PLANT HEIGHT (MM.)	POT SIZE (MM.)	SPACING (MM.)	TOTAL QTY (Nos.)
1.		BOUGAINVILLEA ASSORTED COLOURS	——	900	200	1000	356
2.		BOUGAINVILLEA MAHARA	——	900	200	750	113
3.		CANNA INDICA EXOTICA	CANNA	600	200	300	247
4.		DRACAENA MARGINATA 'TRICOLOR'	RAINBOW PLANT	450	200	200	435
5.		FICUS BENJAMINA	JAVA FIG TREE	1200	POLYBAG	900	280
6.		FICUS PANDA	GOLDEN FICUS	450	POLYBAG	300	3407
7.		FICUS REGINOLD	GOLDEN FIG TREE	1200	POLYBAG	900	158
8.		FICUS STARLITE	——	600	POLYBAG	450	244
9.		FURCARAEA GIGANTIA 'MEDIO-PICTA'	GIANT FALSE AGAVE	600	POLYBAG	450	78
10.		HIBISCUS ROSA - SINENSIS 'SNOWFLAKE'	CHINESE HIBISCUS	600	POLYBAG	300	1540
11.		HIBISCUS ROSA - SINENSIS 'COOPERI'	——	600	POLYBAG	300	904
12.		HYMENOCALLIS LITTORALIS	SPIDER LILY	450	POLYBAG	300	833
13.		JASMINUM SAMBAC 'MOGRA' (SCENTED FLOWERS)	MOGRA	450	POLYBAG	300	456
14.		JASMINUM SAMBAC 'MOTIA' (SCENTED FLOWERS)	MOTIA	450	POLYBAG	300	272
15.		PENNISETUM RUBRUM	FOUNTAIN RED GRASS	450	POLYBAG	300	63
16.		PLEOMELE REFLEXA 'VARIEGATA'	SONG OF INDIA	600	POLYBAG	300	365
17.		RAPHIS EXCELSA	RAPHIS PALM	450	200	450	1616
18.		SCHEFFLERA ARBORICOLA 'VARIEGATA'	VARIEGATED SCHEFFLERA	300	POLYBAG	300	272
19.		TABERNAEMONTANA CORONARIA 'VARIEGATED'	VARIEGATED CHANDNI	600	POLYBAG	300	198
20.		TECOMA GAUDICHAURI	YELLOW BELLS	900-1200	600	900	109
						TOTAL	12948

SCHEDULE & BOQ OF PROPOSED GROUND COVERS

SR NO.	SYMBOL	BOTANICAL NAME	COMMON NAME	PLANT HEIGHT (MM.)	POT SIZE (MM.)	SPACING (MM.)	TOTAL QTY (Nos.)
1.		ASPARAGUS MEYERII	FOX TAIL ASPARAGUS	250	POLYBAG	150	8682
2.		CHLOROPHYTUM LAXUM	LILY TURF	250	POLYBAG	300	213
3.		CLERODENDRUM INERME	FOREST JASMINE	250	POLYBAG	250	1614
4.		CORDYLINE BABY DOLL	'''	250	POLYBAG	200	6344
5.		CORDYLINE MY DARLING	'''	250	POLYBAG	200	4222
6.		DIANELLA TASMANICA 'VARIEGATA'	BLUE FLAX LILY	250	POLYBAG	200	2588
7.		DRACAENA KEDARNATH	'''	450	POLYBAG	300	448
8.		DRACAENA VICTORIA	'''	450	POLYBAG	300	738
9.		DURANTA GOLDIANA	GOLDEN DURANTA	300	POLYBAG	300	1088
10.		FICUS LONGISLAND	CROWN OF THORNS	450	POLYBAG	300	400
11.		HAMELIA PATENS 'DWARF'	'DWARF' SCARLET BUSH	250	POLYBAG	300	272
12.		IRESENE LINDENII	LAAL SAAG	200	POLYBAG	150	14405
13.		LANTANA DEPRESSA	YELLOW LANTANA	300	POLYBAG	300	563
14.		IXORA CHINENSIS NANA PINK	DWARF PINK IXORA	200	POLYBAG	300	499
15.		RHOEO SPATHACEA 'COMPACTA'	DWARF BOAT LILY	300	POLYBAG	300	1106
16.		SYNGONIUM PODOPHYLLUM 'BUTTERFLY'	WHITE SYNGONIUM	200	POLYBAG	200	8877
17.		VINCA ROSEA 'HYBRID VAR.'	MADAGASCAR PERIWINKLE	250	POLYBAG	250	1357
18.		VINCA ALBA 'HYBRID VAR.'	MADAGASCAR PERIWINKLE	250	POLYBAG	250	1941
19.		TABERNAEMONTANA CORONARIA 'DWARF'	VARIEGATED CHANDNI	300	POLYBAG	300	1616
20.		WEDELIA TRILOBATA	WEDELIA	200	POLYBAG	150	16215
21.		ZEBRINA PENDULA	WANDERING JEW	200	POLYBAG	300	586
						TOTAL	73790

PLANT SPACING (PS)	ROW SPACING (RS)	NO. OF PLANTS (Quantity in nos./sqm.)
150 mm	150 mm	44.44 nos./sqm.
200 mm	200 mm	25.00 nos./sqm.
250 mm	250 mm	16.00 nos./sqm.
300 mm	300 mm	11.11 nos./sqm.
375 mm	375 mm	7.11 nos./sqm.
450 mm	450 mm	4.93 nos./sqm.
600 mm	600 mm	2.77 nos./sqm.
750 mm	750 mm	1.77 nos./sqm.
900 mm	900 mm	1.23 nos./sqm.

SCHEDULE & BOQ OF PROPOSED BAMBOOS

SR NO.	SYMBOL	BOTANICAL NAME	COMMON NAME	PLANT HEIGHT (MM.)	SPACING (MM.)	TOTAL QTY (Nos.)
1.		BAMBUSA VULGARIS (IN CLUSTERING STEM)	GOLDEN BAMBOO	2100 - 2400	450	129
2.		BAMBUSA VENTRICOSA	BUDDHA BELLY BAMBOO	1200 - 1500	450	340
					TOTAL	469

SCHEDULE & BOQ OF GRASSES

SR NO.	SYMBOL	BOTANICAL NAME	COMMON NAME	GRASS HEIGHT (MM.)	GRASSING METHOD	SPACING (MM.)	AREA (Sqm.)
1.		GOA SELECTION NO. 1 GRASS	SELECTION NO. 1 GRASS	50	BY DIBBLING	50	3039.00
						TOTAL AREA	3039.00

JOB NO.: AHGN - 317/

DRAWING NO.: L32

REVISION:

NORTH: N

SCALE: 1:350 (A1 EXTD)

DATE: 30.11.2015

CHECKED BY: K.C.S.

DEALT BY: ZUBAIR

DRG. TITLE
OVERALL PLANTING PLAN BOQ & SCHEDULE OF PLANTS - SHRUBS, GROUNDS COVERS & LAWN (STAGE 2)

PROJECT
ARIHANT ARDEN HOUSING, Plot No. - GH-07, Sec. 1, Greater Noida

CLIENT
M/s Arihant Infra Realtors Pvt. Ltd., Delhi

ARCHITECT: M/s Arihant Associates
Plot No. 16 Ashoklek Plaza L.S.C. Mayur Vihar Ph II Delhi - 110 091 Ph: 65272180 Telefax: 22770180

LANDSCAPE CONSULTANT KRISHAN C. SINGAL

Singal Associates
Architects, Landscape Architects & Interior Designers
D-220, Anand vihar, New Delhi-92 TEL: 22155898,42427206
FAX : 011-22164760 E-mail : singalassociates@airtelmail.in

THIS DRAWING IS THE PROPERTY OF SINGAL ASSOCIATES AND NOT TO BE COPIED OR USED WITHOUT THEIR PERMISSION

PATH: D:\Singal Associates\Current Projects\Arihant Arden Housing\ Client\ Issued\Drawings\L32 (Landscape Planting Plan - Shrubs, Ground Covers - Stage -2

DATE	REV	DESCRIPTION	09.12.15 DATE	email NO.	Client/Architect ISSUED TO
REVISIONS			DISTRIBUTION		

GENERAL NOTES:

1. ALL DIMENSIONS & LEVELS ARE IN MILLIMETERS UNLESS MENTIONED OTHERWISE.
2. THE CONTRACTOR SHOULD CHECK AND VERIFY ALL DIMENSIONS AND LEVELS AT SITE PRIOR TO COMMENCEMENT OF WORK AT SITE. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE LANDSCAPE ARCHITECT.

GOOD FOR CONSTRUCTION
ISSUED ON: Dec. 09, 2015

C:\Users\PC\Downloads\L32 (Overall Landscape Planting Plan, Schedule & BOQ of Plants - Stage 2...dwg, 03/02/2018 16:21:16,
DWG To PDF.pc3